



# LIGHTPLANE+ 2R


LPX2R | RECESSED



## SPECIFICATIONS

<b>PROFILE</b>	2" Aperture, 3 1/4" height
<b>SIZES</b>	Individual/Straight Run sections starting at 2ft. Continuous runs & shapes
<b>LED OUTPUT</b>	350lm/ft - 1,500lm/ft, up to 169 lm/ft
<b>CCT/CRI</b>	2700K/3000K/3500K/4000K/5000K • 80 or 90+ CRI Tunable White (2700K - 6500K) • RGB and RGB+W
<b>DIMMING/ DRIVER</b>	Integral and Remote Driver: 0-10V, Phase, DALI, DMX, eldoLED, Lutron®, PoE (Molex, NuLEDs, WTEC Smartengine). Dimming to 0% for select models.
<b>EMBEDDED CONTROLS</b>	Acuity nLight, Avi-on, Casambi, Cooper Wavelinx, Encelium, Enlighted, Lutron Athena, Lutron Vive, NX Controls, Wattstopper, and more
<b>POWER</b>	3W - 12.2W per ft
<b>INPUT</b>	120VAC, 277VAC, or 347VAC
<b>OPTICS</b>	Lambertian, Low Glare (UGR < 16), Asymmetric, Widespread
<b>LENS</b>	Standard Snap-in & ControlRoll Flush, Regressed
<b>FINISHES</b>	16 powder coat finishes - Custom finishes also available
<b>MATERIAL</b>	6063-T6 Extruded Aluminum, See Declare listing <a href="#">here</a>
<b>ENVIRONMENT</b>	Dry or damp locations
<b>WARRANTY</b>	11 years
<b>WELL/UGR</b>	See ALW <a href="#">WELL</a> and <a href="#">BIOS</a> pages for recommended options that contribute to meeting the WELL Building Standard™

## DISTRIBUTIONS & PROFILES

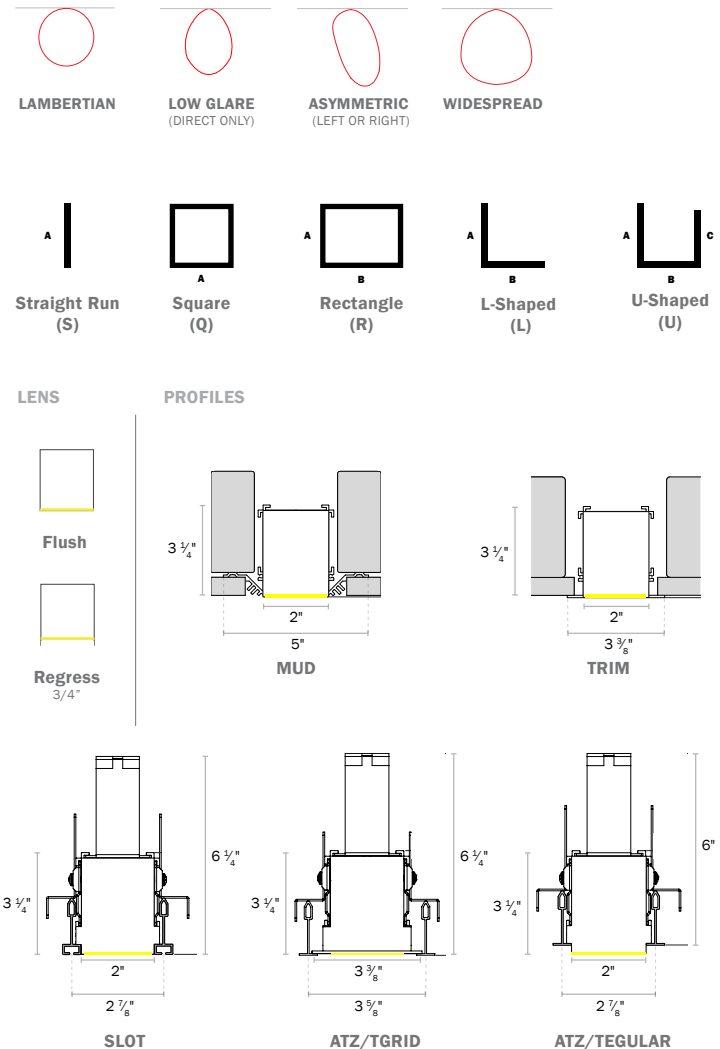

Not to scale. Dimensions are nominal. Consult factory for CAD drawing





**PRODUCT SPECIFICATION SHEET**

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----

**EXAMPLE: LPX2RMDFN – S8 – 053090SLV00 – SW – UNV – EMC/2 – N – N – DC – QS**

1. FAMILY	2. SIZE	3. MODEL (CHOOSE 1)	4. MOUNTING (CHOOSE 1)	5. LENS TYPE (CHOOSE 1)
-----------	---------	---------------------	------------------------	-------------------------


QS <b>LPX</b> Lightplane <sup>†</sup>	QS <b>2</b> 2"	QS <b>R</b> Recessed Direct	QS <b>MD</b> Mud QS <b>TM</b> <sup>‡</sup> Trim QS <b>T9</b> TGrid 9/16 QS <b>T5</b> TGrid 15/16 <b>HF</b> Hidden Flange <b>ST</b> Slot <b>G9</b> Tegular 9/16 <b>G5</b> Tegular 15/16 <b>AS</b> <sup>‡,§</sup> Armstrong Techzone® Slot <b>A9</b> <sup>‡,§</sup> Armstrong Techzone® T-grid 9/16 <b>A5</b> <sup>‡,§</sup> Armstrong Techzone® T-grid 15/16 <b>AG</b> <sup>‡,§</sup> Armstrong Techzone® Tegular 9/16 <b>AW</b> <sup>¶</sup> Armstrong Woodworks® <b>AM</b> <sup>¶</sup> Armstrong Metalworks®	QS <b>FN</b> Flush Lens <b>RN</b> Regress Lens (3/4") <b>CN</b> ControlRoll Flush Lens <sup>†</sup> <i>*Select for Widespread &amp; Asymmetric Optics</i>
---------------------------------------	----------------	-----------------------------	---	--

<sup>†</sup>For install in wood, drywall, metal, etc.  
<sup>‡</sup>Fits Armstrong 4" TechZone®  
<sup>§</sup>All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them.

6. SHAPE/LENGTH* (CHOOSE 1 & ENTER LENGTH IN FEET) - FOR CUSTOM ANGLES, CONTACT ALW	7. LUMENS* (CHOOSE 1)	8. CCT (CHOOSE 1)
---	-----------------------	-------------------

QS <b>S</b> ___ Individual/Straight Run Section (enter length in product code above, ex. S18)	QS <b>03</b> 350lm/ft	QS <b>N</b> Choose for RB, RW, or BO
QS <b>Q</b> ___ Square Configuration (enter side length A, ex: Q18)	QS <b>05</b> 500lm/ft	QS <b>27</b> <sup>‡</sup> 2700K
QS <b>R</b> ___/___ Rectangular Configuration (enter side lengths A and B, ex. R12/24)	QS <b>07</b> 750lm/ft	QS <b>30</b> 3000K
QS <b>L</b> ___/___ L-Shaped Configuration (enter side lengths A and B, ex. L12/24)	QS <b>10</b> 1000lm/ft	QS <b>35</b> 3500K
QS <b>U</b> ___/___/___ U-Shaped Configuration (enter side lengths A, B, and C, ex. U12/12/24)	QS <b>12</b> 1200lm/ft	QS <b>40</b> 4000K

\*To qualify for QS, all corners of shape must be 90°, same plane  
\*Lengths greater than 8' consist of multiple individual housing sections joined together. Lengths are nominal and may vary based on lamping and other specification selections. Consult ALW when exact lengths are required.



Shape orientation (Looking from the Ceiling down to the floor).

<b>RB</b> RGB	QS <b>15</b> 1500lm/ft	QS <b>50</b> <sup>§</sup> 5000K
<b>RW</b> RGB + 3500K White, 80CRI	<b>BO</b> /____ <sup>4</sup> BIOS, 80CRI. Choose your lm/ft	<b>TW</b> <sup>¶</sup> Tunable White, 90CRI, 2700K - 6500K
<b>CM</b> /____ <sup>5</sup> Custom Lumens. Write in your lumens/ft (ex: 0100 = 100lm/ft).	<sup>‡</sup> 2700K only available in 90CRI <sup>§</sup> 5000K only available in 80CRI <sup>¶</sup> Tunable White (TW) not available with BIOS. BIOS has its own tunable white option to be specified by request.	

<sup>4</sup>For delivered lumens and watts, see "Performance Details"  
<sup>5</sup>Contact ALW for specific BIOS specifications  
<sup>6</sup>1500lm/ft option only available with Control Roll lenses  
<sup>7</sup>Custom lumens available from 100 - 1500lm/ft

9. CRI (CHOOSE 1)	10. OPTICS* (CHOOSE 1)	11. DRIVER* (CHOOSE 1)	12. FINISH* (CHOOSE 1)
-------------------	------------------------	------------------------	------------------------

QS <b>N</b> Choose for RB, RW, or TW	QS <b>SL</b> <sup>10</sup> Standard Lambertian	QS <b>V00</b> 0-10V, dim to 0%	<b>STANDARD FINISHES</b>
QS <b>80</b> 80	QS <b>LG</b> <sup>10</sup> Low Glare	QS <b>V01</b> 0-10V, dim to 1%	QS <b>SW</b> <input type="checkbox"/> Satin White
QS <b>90</b> 90	<b>CONTROLROLL LENS ONLY</b>	<b>LDE</b> Lutron LDE1 Ecosystem, dim to 1%	QS <b>SB</b> <input type="checkbox"/> Satin Black
	<b>AL</b> <sup>11</sup> Asymmetric Left (outside of shape)	<b>P01</b> <sup>12</sup> ELV/TRIAC phase dim to 1%	QS <b>AS</b> <input type="checkbox"/> Aluminum Silver Anodized Effect
	<b>AR</b> <sup>11</sup> Asymmetric Right (inside of shape)	<b>TSE</b> <sup>13</sup> Lutron T-Series Driver	QS <b>TB</b> <input type="checkbox"/> Textured Black
	<b>WS</b> Widespread	<b>ELO</b> eldoLED, 0-10V dim to 0%	<b>PREMIUM FINISHES</b>
	<sup>9</sup> See LEED + WELL guide for optic/output combos that fall under standard UGR and intensity levels	<b>DAL</b> DALI, dim to 0%	--- See chart on page 10 for premium finishes. Manually type in the finish code (Ex: OB = Oil-Rubbed Bronze)
	<sup>10</sup> Regress (RN) lens is only available with Low Glare(LG) and Standard Lambertian (SL) lens types. See page 4 for LED Optics Compatibility.	<b>DMX</b> <sup>14</sup> DMX, dim to 0%	<b>SPECIAL ORDER FINISHES*</b>
	<sup>11</sup> See page 4 for explanation of Asymmetric lens specification	<b>POE</b> <sup>15</sup> POE Ready	<b>RAL</b> ____ Specify RAL Classic Color (Ex: RAL 3003)
		<b>CM</b> <sup>16</sup> Custom driver	<b>CCM</b> ____ Custom Color Match

<sup>9</sup>See "Driver" and lamping charts for driver details  
<sup>12</sup>Phase dim drivers are 120 VAC only  
<sup>13</sup>For Tunable White (TW) CCT only  
<sup>14</sup>DMX option is only Declare classified, not Red List Free  
<sup>15</sup>Contact ALW with the POE spec details  
<sup>16</sup>Contact ALW for custom driver specifications

\*Manually type in the finish code for special order finishes types

QS = QuickShip-qualifying option. For the entire luminaire configuration to be QuickShip-eligible, ALL options specified in the configuration must be ones notated with "QS".  
NOTE: Maximum 800 ft. of QuickShip-eligible product per order.



**PRODUCT SPECIFICATION SHEET CONT'D**

13. VOLTAGE (CHOOSE 1)	14. EMERGENCY CIRCUITS (OPTIONAL)	15. CONTROL OPTIONS* (OPTIONAL)	16. ADDITIONAL OPTIONS - A (OPTIONAL)
<b>QS UNV</b> Universal Voltage (120VAC-277VAC) <b>347</b> 347 Volt (Driver options may be limited. Not available with EMB)	<b>QS N</b> None <b>QS EMC/___<sup>17</sup></b> Emergency power feed whip for connection to remote Generator Transfer Devices (Specify 1x for every 4ft or contact ALW for longer runs) <b>QS EMB/___</b> 10W Integral Emergency Battery (Specify 1x for every 4ft of emergency lighting) <b>GTD/___</b> Integral Generator Transfer Device/Switch Bypass - 3A (Specify 1x for every 4ft) <b>ALC/___</b> Integral Automated Load Control Relay - 10A (Specify 1x for every 4ft or contact ALW for longer runs)	<b>QS N</b> None <b>FACTORY CONTROLS</b> <b>QS OS/PH/INT/___</b> Integral Occupancy/Daylight sensor <b>QS OS/PH/HV/___</b> Remote Occupancy/Daylight sensor <b>NETWORK CONTROLS</b> <i>Embedded controls below are placeholder specs. See the ALW Controls Guide to finalize your final control spec.</i> <b>AY/xx</b> Acuity <b>AN/xx</b> Avi-on <b>CA/xx</b> Casambi <b>CW/xx/___</b> Cooper Wavelinx <b>EC/xx/___</b> Encelium <b>EN/xx/___</b> Enlighted <b>LU/xx/___</b> Lutron <b>NX/xx/___</b> NX Controls <b>WA/xx/___</b> Wattstopper	<b>QS N</b> None <b>QS CP</b> Chicago Plenum
	<sup>17</sup> No EM components provided. Choose None when designating entire fixture for EMC. When 4ft EMC sections are chosen, the power whip will be labeled as an EMC whip.	<sup>*</sup> Quickship availability on occupancy and photocell daylight sensors may vary. Contact ALW for more information. Contact ALW for Additional Zone specifications	

17. ADDITIONAL OPTIONS - B* (INCLUDED)	18. QUICKSHIP OPTIONS
<b>QS DC</b> Living Building Challenge Declared and Red List Approved <small>*See Declare page for LP+ Declare listing</small>	<b>QS</b> Select if you want your fixture to be <b>QS</b> <b>Note:</b> To be eligible for the Quickship ( <b>QS</b> ) program, all previous selected options must also be marked <b>QS</b>

**QS** = QuickShip-qualifying option. For the entire luminaire configuration to be QuickShip-eligible, ALL options specified in the configuration must be ones notated with "QS".  
 NOTE: Maximum 800 ft. of QuickShip-eligible product per order.


Rev 122024



**LENS & OPTICS COMPATIBILITY**

		OPTICS			
		STANDARD LAMBERTIAN (SL)	LOW GLARE (LG)	ASYMMETRIC (AL, AR)	WIDESPREAD (WS)
LENS TYPES	FLUSH (FN)	●	●		
	CONTROLROLL FLUSH (CN)	●	●	●	●
	REGRESSED (RN)	●	●		

**ASYMMETRIC LEFT (AL)**

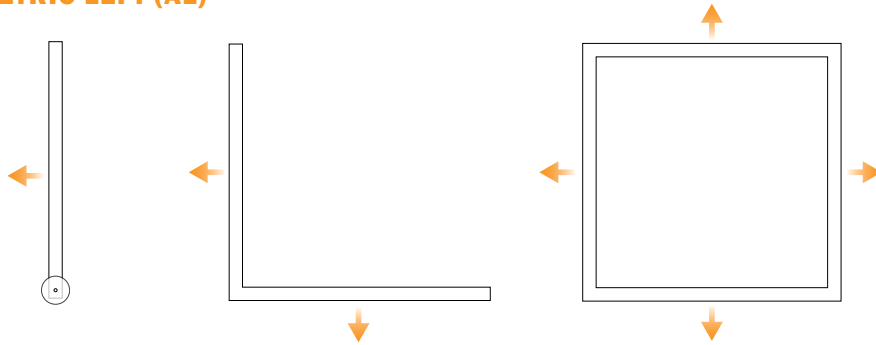


*Note: For unique applications, mark up the submittal drawings for desired asymmetric light throw.*

**Straight Sections**  
Light is thrown to left of the powerfeed  
(Can be reconfigured in field)

**Shapes**  
Light is thrown outside the shape  
(Cannot be reconfigured in the field because of mitered cuts)

**ASYMMETRIC RIGHT (AR)**

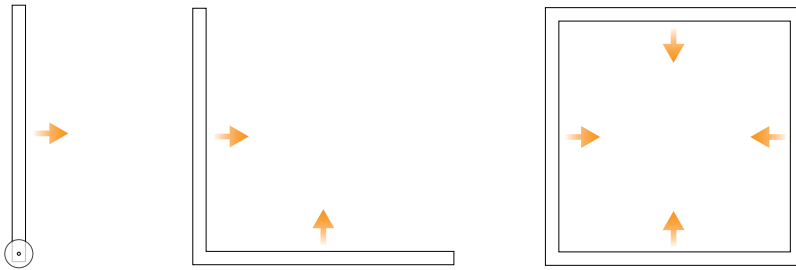

**Straight Sections**  
Light is thrown to right of the powerfeed  
(Can be reconfigured in field)


**Shapes**  
Light is thrown inside the shape  
(Cannot be reconfigured in the field because of mitered cuts)




## LENS DETAILS

Applicable to all models


— FIXTURE BODY      — LENS



**FN**  
FLUSH




**CN**  
CONTROL ROLL FLUSH




**RN**  
REGRESS LENS


## MECHANICAL DIAGRAMS




**LPX2RMDFN**  
RECESSED MUD-IN  
FLUSH LENS




**LPX2RMDRN**  
RECESSED MUD-IN  
REGRESSED LENS

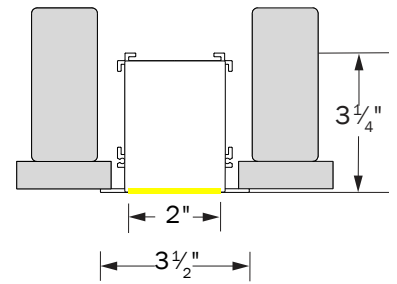


**LPX2RTMFN**  
RECESSED TRIM  
FLUSH LENS



**LPX2RTMRN**  
RECESSED TRIM  
REGRESSED LENS

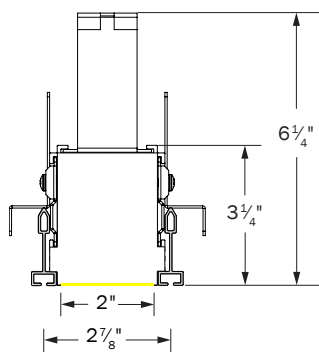

**LPX2RSLFN**  
RECESSED SLOT  
FLUSH LENS

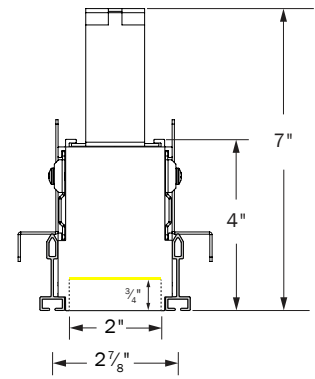


**LPX2RSLRN**  
RECESSED SLOT  
REGRESSED LENS


Rev 122024




**MECHANICAL DIAGRAMS CONT'D**

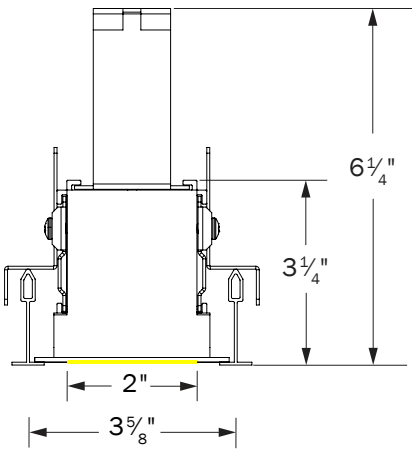


**LPX2RT9FN**  
RECESSED TGRID 9/16  
FLUSH LENS

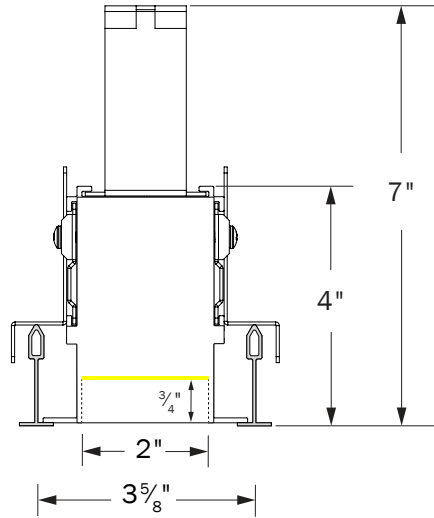


**LPX2RT9RN**  
RECESSED TGRID 9/16  
REGRESSED LENS

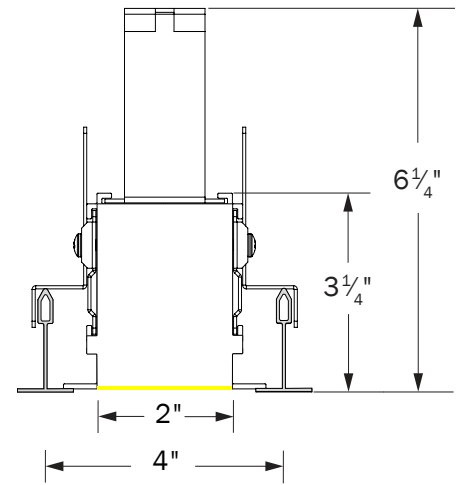


**LPX2RT5FN**  
RECESSED TGRID 15/16  
FLUSH LENS

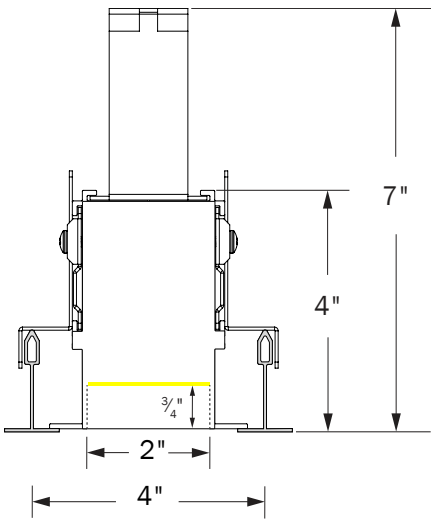

**LPX2RT5RN**  
RECESSED TGRID 15/16  
REGRESSED LENS

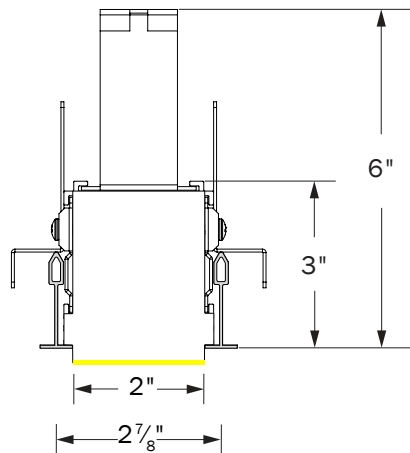


**LPX2RG9FN**  
RECESSED TEGULAR 9/16  
FLUSH LENS

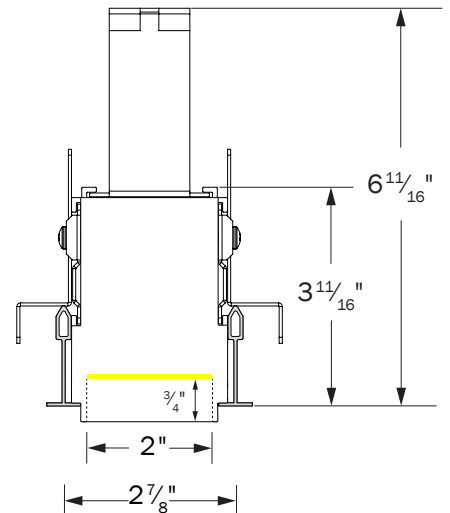


**LPX2RG9RN**  
RECESSED TEGULAR 9/16  
REGRESSED LENS




**MECHANICAL DIAGRAMS CONT'D**

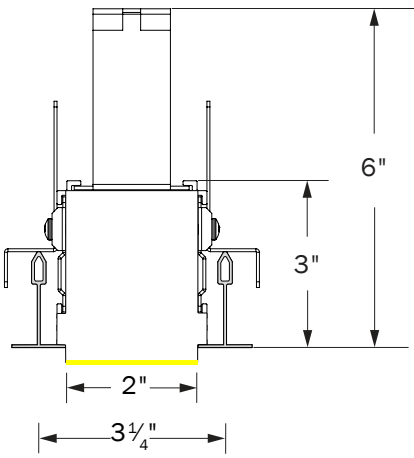


**LPX2RG5FN**  
RECESSED TEGULAR 15/16  
FLUSH LENS

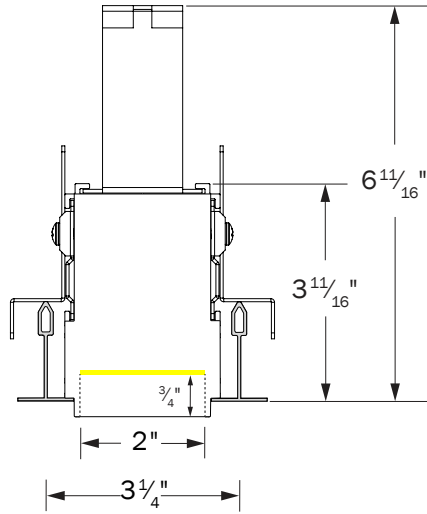


**LPX2RG5RN**  
RECESSED TEGULAR 15/16  
REGRESSED LENS

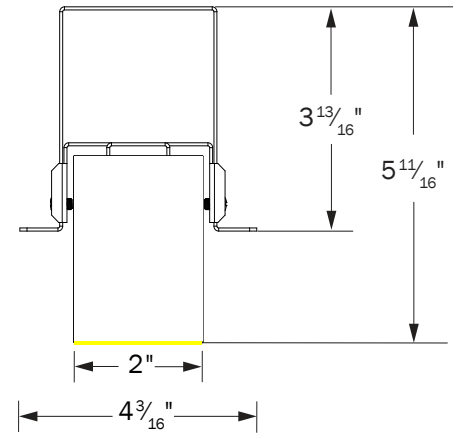


**LPX2RHFFN**  
RECESSED HIDDEN FLANGE  
FLUSH LENS

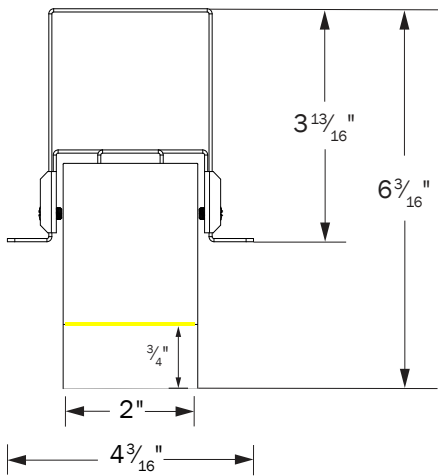

**LPX2RHFRN**  
RECESSED HIDDEN FLANGE  
REGRESSED LENS

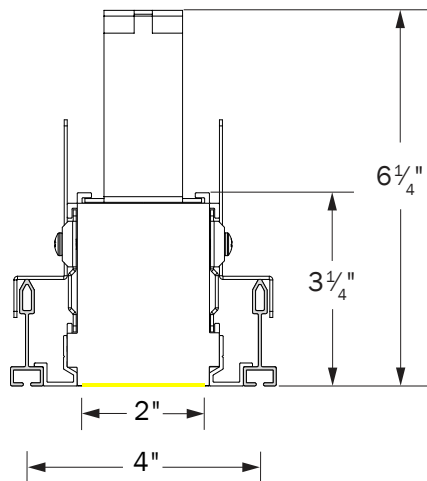


**LPX2RASFN**  
RECESSED SLOT ARMSTRONG  
TECHZONE® FLUSH LENS

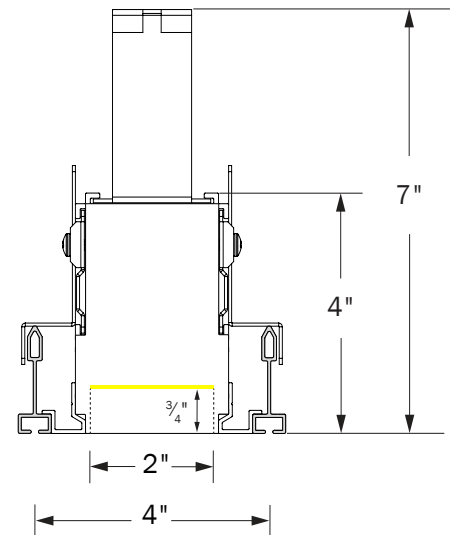


**LPX2RASRN**  
RECESSED SLOT ARMSTRONG  
TECHZONE® REGRESSED LENS




**MECHANICAL DIAGRAMS CONT'D**

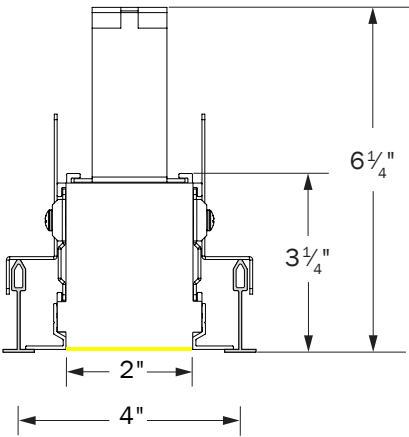


**LPX2RAGFN**  
RECESSED TGRID 9/16  
ARMSTRONG TECHZONE®  
FLUSH LENS

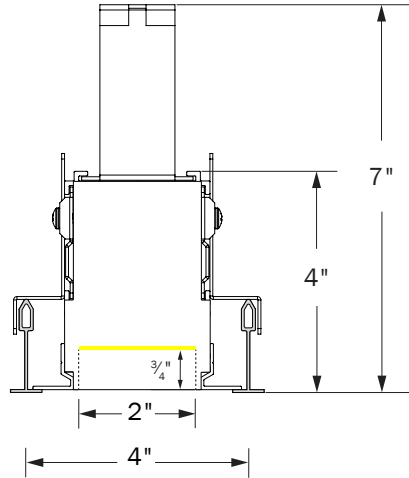


**LPX2RA9RN**  
RECESSED TGRID 9/16  
ARMSTRONG TECHZONE®  
REGRESSED LENS

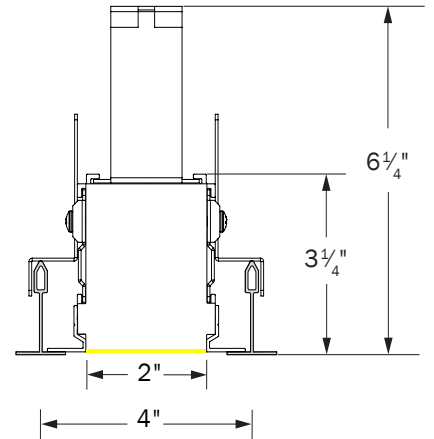


**LPX2RA5FN**  
RECESSED TGRID 15/16  
ARMSTRONG TECHZONE®  
FLUSH LENS

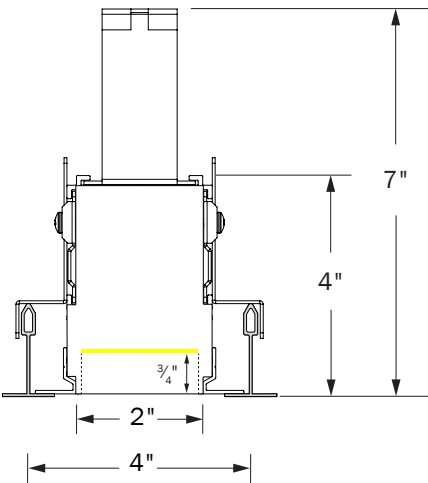

**LPX2RA5RN**  
RECESSED TGRID 15/16  
ARMSTRONG TECHZONE®  
REGRESSED LENS

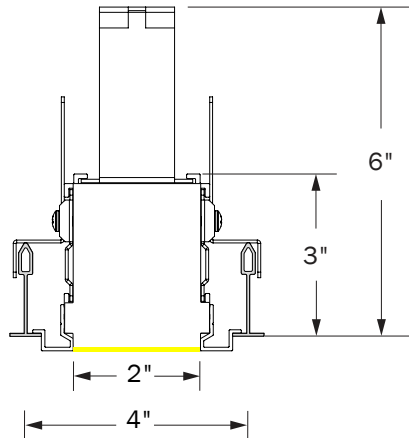

**LPX2RAGFN**  
RECESSED TEGULAR 9/16  
ARMSTRONG TECHZONE®  
FLUSH LENS

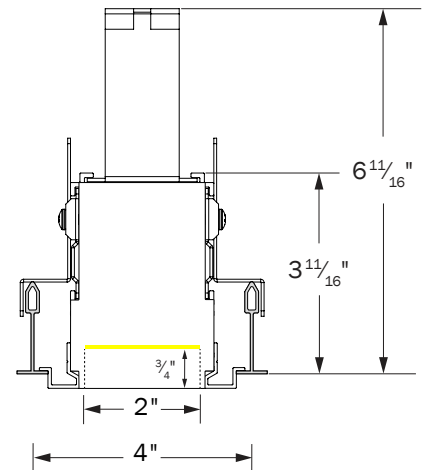


**LPX2RAGRN**  
RECESSED TEGULAR 9/16  
ARMSTRONG TECHZONE®  
REGRESSED LENS







**MECHANICAL DIAGRAMS CONT'D**

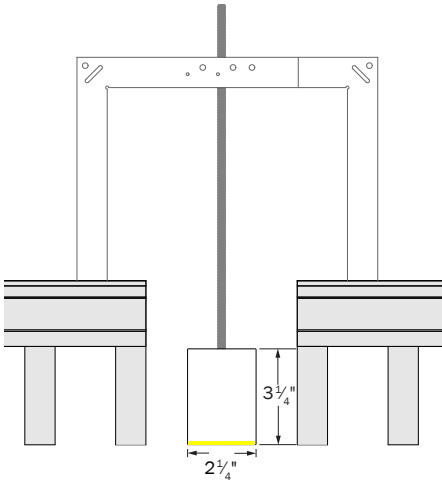


**LPX2RAWFN**  
RECESSED ARMSTRONG  
WOODWORKS® FLUSH LENS

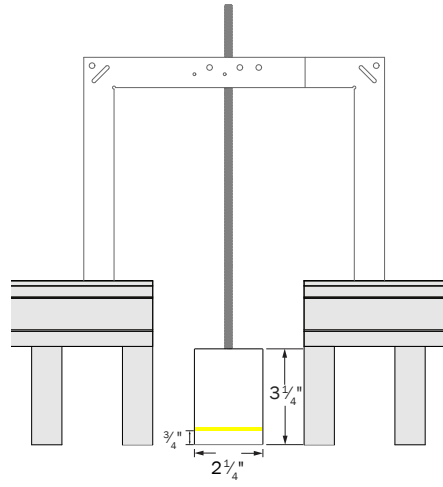

**LPX2RAWRN**  
RECESSED ARMSTRONG  
WOODWORKS® REGRESSED LENS

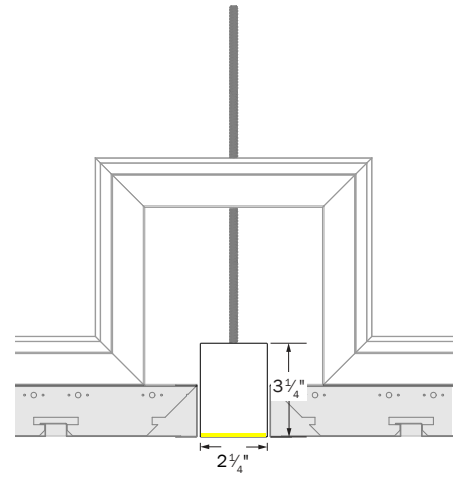

**LPX2RAMFN**  
RECESSED ARMSTRONG  
METALWORKS® FLUSH LENS

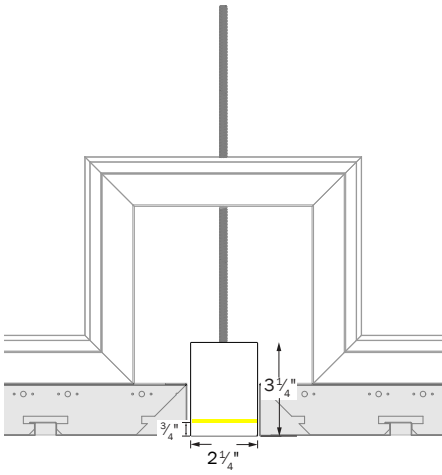


**LPX2RAMRN**  
RECESSED ARMSTRONG  
METALWORKS® REGRESSED LENS



## FINISHES


Standard finishes are available at no additional charge.

### STANDARD FINISHES - QS ELIGIBLE

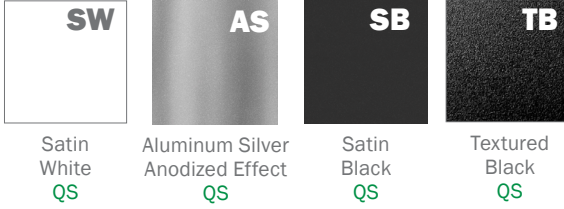


### PREMIUM FINISHES

#### BASIC POWDER COAT

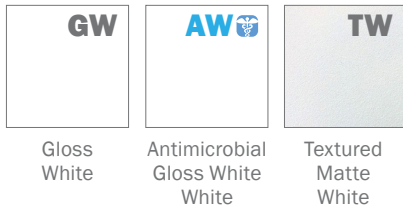


#### METALLIC POWDER COAT

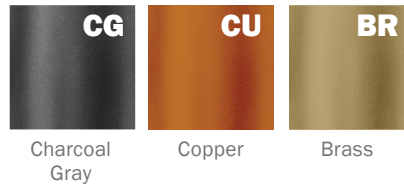

#### SATIN ANODIZED EFFECT POWDER COAT



#### GLOSS POWDER COAT (80-95% GLOSS)

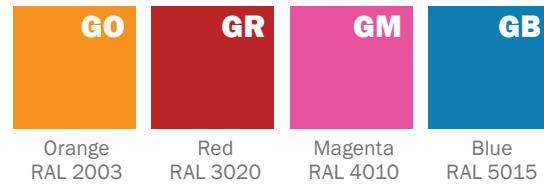

Contact ALW Quotes for sample paint finish swatches.

### SPECIAL ORDER FINISHES\*



#### RAL CLASSIC COLORS (80-95% GLOSS): RAL\_ \_ \_ \_

Most RAL Classic Colors are available for a minimum setup fee. On your specification submittal choose your RAL color by entering the 4-digit RAL code (Ex: RAL 3003). See [www.alw-inc.com/resources/finishes](http://www.alw-inc.com/resources/finishes)



#### CUSTOM COLOR MATCH: CCM\_ \_ \_ \_

Custom powder coat color matching is available for a premium setup fee. Consult ALW for additional information.

\*An individual setup fee will apply to each unique Special Order Finish per purchase order.  
(ex: RAL 5023 and RAL 2008 are specified for multiple line items on a purchase order. 2x setup fees will apply)

\*Printed or on-screen colors are only approximations - consult actual Color Chip Set before specifying



**PERFORMANCE DETAILS - STANDARD LENSES**

OUTPUT OPTION	OPTIC TYPE	DELIVERED LUMENS/FT	EFFICACY (LM/W)	WATTS/FT <sup>18</sup>	CRI OPTIONS	CCT OPTIONS
<b>03<sup>19</sup></b>	SL	359	119	3	80+ 90+	2700K 3000K 3500K 4000K 5000K
	LG	416	138			
	SL (Regress)	369	123			
	LG (Regress)	306	102			
<b>05<sup>19</sup></b>	SL	511	117	4.4		
	LG	593	136			
	SL (Regress)	526	121			
	LG (Regress)	435	100			
<b>07<sup>19</sup></b>	SL	764	122	6.3		
	LG	887	141			
	SL (Regress)	787	125			
	LG (Regress)	651	104			
<b>10<sup>19</sup></b>	SL	1008	112	9		
	LG	1170	130			
	SL (Regress)	1038	115			
	LG (Regress)	859	95			
<b>12<sup>19</sup></b>	SL	1204	110	11		
	LG	1398	127			
	SL (Regress)	1240	113			
	LG (Regress)	1026	94			
<b>TUNE</b>	SL (Warm White)	921	65	14.2	90	2700K - 6500K
	SL (Cool White)	977	69			
<b>RGB<sup>20</sup></b>	SL	184	39	4.7	N/A	
<b>RGBW<sup>20</sup></b>	SL	W: 177 RGB: 184	53	6.8	W: 80 CRI	W: 3500K

<sup>18</sup> Lumens/Watt and Watts/ft have been calculated assuming a driver efficiency of 85%. Depending on field conditions, actual measured values may fluctuate by 5-8%.

<sup>19</sup> Performance calculations are based on LM-79 test of 1200lm output at 80 CRI and 3500K. All other output calculations are extrapolated values.

<sup>20</sup> Performance calculations are derived from LM-79 test with all RGB LEDs illuminated (Red, Green, Blue) and White LED only illuminated



**PERFORMANCE DETAILS - CONTROLROLL**

OUTPUT OPTION	OPTIC TYPE	DELIVERED LUMENS/FT	EFFICACY (LM/W)	WATTS/FT <sup>21</sup>	CRI OPTIONS	CCT OPTIONS
03 <sup>22</sup>	SL	357	134	2.7	80+ 90+	2700K 3000K 3500K 4000K 5000K
	WS	394	148			
	AL	425	160			
	LG	395	149			
05 <sup>22</sup>	SL	505	133	3.8		
	WS	559	147			
	AL	602	158			
	LG	560	147			
07 <sup>22</sup>	SL	771	131	5.9		
	WS	853	145			
	AL	918	156			
	LG	855	145			
10 <sup>22</sup>	SL	1028	129	8		
	WS	1137	143			
	AL	1224	153			
	LG	1140	143			
12 <sup>22</sup>	SL	1210	127	9.5		
	WS	1338	141			
	AL	1440	152			
	LG	1341	141			
15 <sup>22</sup>	SL	1516	125	12.2		
	WS	1676	138			
	AL	1804	148			
	LG	1681	138			
TUNE	SL (Warm White)	1044	74	14.2	90	2700K - 6500K
	SL (Cool White)	1108	78			
RGB <sup>23</sup>	SL	209	44	4.7	N/A	
RGBW <sup>23</sup>	SL	209	31	6.7	W: 80 CRI	W: 3500K

<sup>21</sup>Lumens/Watt and Watts/ft have been calculated assuming a driver efficiency of 85%. Depending on field conditions, actual measured values may fluctuate by 5-8%.

<sup>22</sup>Performance calculations are based on LM-79 test of 600lm output at 80 CRI and 3500K. All other output calculations are extrapolated values.

<sup>23</sup>Performance calculations are derived from LM-79 test with all RGB LEDs illuminated (Red, Green, Blue) and White LED only illuminated

**TM-30-18 DETAILS (90 CRI LAMPING)**

CCT	CRI (Ra)	CRI (R9)	TM-30 Rf	TM-30 Rg	Duv
2700K	94	56	92	100	-0.0009
3000K	94	59	92	100	-0.0013
3500K	94	64	92	100	-0.0005
4000K	94	66	92	100	-0.0004

PRODUCT CODE	DESCRIPTION
V00	0-10V dimming down to 1% with electronic dim-to-off (0%).
V01	0-10V dimming down to 1%.
LDE	Lutron Hi-Lume (LDE1) 1% EcoSystem LED driver with Soft-on, Fade-to-Black dimming technology.
P01	TRIAC Forward Phase 2-Wire and ELV Reverse Phase 3-Wire hybrid LED driver. Dimming down to 1%. 120VAC only.
ELO	EldoLED 0-10V SOLODrive 0.1% dimming with electronic dim-to-off (0%).
TSE	Lutron T-Series (PSQ0) 1% 2-channel tunable white driver (For use with Lutron Quantum Control Systems).
DAL	DALI flicker-free dimming down to 1% with electronic dim-to-off (0%).
DMX	DMX flicker-free dimming down to 0%.
POE/READY	Specify a PoE driver of your choice. Fixture supplied with low voltage leads and no LED driver. Contact ALW to register your project.

\*Most drivers can be programmed to specific dimming levels if desired. Contact ALW for specific dimming level requests.  
 ALW lighting fixtures are intended for use with a wide range of sensors, lighting controls, LED drivers, and building management systems. If there are specific components required for your application that aren't listed on this spec sheet, please contact ALW customer support to specify a compatible solution of your choice.

DRIVER/LED LAMPING COMPATIBILITY						
	STD	STD/BIOS	TUNE*	RGB OR RGBW	CA TITLE 24 JA8/JA10 <sup>24</sup>	IEEE P1789 & HD TV STUDIO <sup>25</sup>
V00	●	●	●		●	
V01	●	●	●		●	
LDE	●	●			●	●
P01	●	●			●	
ELO	●	●	●		●	●
TSE			●		●	●
DALI	●	●	●		●	
DMX	●	●	●	●	PER REQUEST	PER REQUEST
POE/READY	PER REQUEST					

- - Indicates compatibility
- \* Standard lamping (STD) - 350 - 1500 lm/ft
- <sup>24</sup> Fixtures specified with 90CRI 2700K, 3000K, 3500K, 4000K, and 5000K lamping with applicable LED drivers have the ability to conform to California Title 24 JA8 and JA10 Appendices
- <sup>25</sup> The following drivers conform to IEEE P1789 Flicker Standard: 'IEEE Recommended Practices for Modulating Current in High-Brightness LEDs for Mitigating Health Risks to Viewers'. These drivers may also be installed in HD TV Studio applications utilizing high frequency camera equipment.

\*ELO with TUNE Lamping will include an EldoLED DUALDrive 0-10V Tunable White LED Driver.



**PHOTOMETRICS - STANDARD LENSES**

OPTIC	POLAR PLOT (CD)	MTG HEIGHT	LIGHT LEVEL (FC)	SPACING CRITERION (SC) <sup>26</sup> (0°- 180°) (90°- 270°)	MAX INTENSITY (CD)	OUTPUT (LM/FT)
LG		6 ft	18.4	1.20 1.14	619.4	1398
		8 ft	10.3			
		10 ft	6.6			
		12 ft	4.6			
		14 ft	3.4			
		16 ft	2.6			
SL		6 ft	11.9	1.24 1.24	428.8	1204
		8 ft	6.7			
		10 ft	4.3			
		12 ft	3.0			
		14 ft	2.2			
		16 ft	1.7			

\*Photometric calculations based on 1200lm 3500K 80 CRI fixture combination. Actual results may vary in the field.

For footcandle and output multipliers refer to the [ALW Lightplane+ IES File Multipliers Chart](#)

<sup>26</sup>Spacing criterion refers to maximum distance luminaires can be spaced to provide uniform illumination on the working plane or surface.  
Luminaire spacing = Spacing Criterion (SC) x Mounting Height (MH) (ex. 1.14 (SC) x 10' (MH) = 11.4' Luminaire Spacing).



**PHOTOMETRICS - CONTROLROLL**

OPTIC	POLAR PLOT (CD)	MTG HEIGHT	LIGHT LEVEL (FC)	SPACING CRITERION (SC) <sup>27</sup> (0°- 180°) (90°- 270°)	MAX INTENSITY (CD)	OUTPUT (LM/FT)
AL		6 ft	19	1.18 1.48	784.5	1804
		8 ft	10.7			
		10 ft	6.9			
		12 ft	4.8			
		14 ft	3.5			
		16 ft	2.7			
WS		6 ft	16	1.4 1.2	578.6	1676
		8 ft	9			
		10 ft	5.8			
		12 ft	4			
		14 ft	2.9			
		16 ft	2.3			
LG		6 ft	20.7	1.02 1.14	745.8	1681
		8 ft	11.7			
		10 ft	7.5			
		12 ft	5.2			
		14 ft	3.8			
		16 ft	2.9			
SL		6 ft	16.1	1.22 1.20	579.6	1516
		8 ft	9.1			
		10 ft	5.8			
		12 ft	4			
		14 ft	3			
		16 ft	2.3			

\*Photometric calculations based on 1ft length, 1500lm, 3500K, 80 CRI fixture combination. Actual results may vary in the field.

For footcandle and output multipliers refer to the [ALW Lightplane+ IES File Multipliers Chart](#)

<sup>27</sup>Spacing criterion refers to maximum distance luminaires can be spaced to provide uniform illumination on the working plane or surface.  
Luminaire spacing = Spacing Criterion (SC) x Mounting Height (MH) (ex. 1.14 (SC) x 10' (MH) = 11.4' Luminaire Spacing).



## ADDITIONAL OPTIONS & SPECIFICATIONS

### LED PERFORMANCE

**80 CRI** | L70 Calculated Hours: 180,000hrs  
L80 Calculated Hours: 119,000hrs


**90 CRI** | L70 Calculated Hours: 171,000hrs  
L80 Calculated Hours: 108,000hrs

### HOUSING


100% recyclable, extruded architectural grade 6063 aluminum with a 0.09" minimum wall thickness.

### LENS & OPTICS


ALW offers three different lens types: Flush, ControlRoll Flush, and Regressed. A wide range of optics are available including, Lamberian, Asymmetric ControlRoll, Low Glare, and Widespread ControlRoll. See page 4 for the Lens & Optics Compatibility chart.



**FN**  
STANDARD FLUSH



**RN**  
REGRESSED



**CN**  
CONTROLROLL FLUSH

The optically engineered ControlRoll lens provides smooth, uniform, and seamless illumination for linear lengths of 250' to eliminated lens gaps. ControlRoll lens rolls out and presses into the housing channel for easy installation.



### SAFETY & REGULATORY

ETL Listed (U.S. & Canada). Suitable for dry or damp locations.

*For integral driver*, Conforms to UL std. 1598 luminaires,

*For remote driver*, Conforms to UL std. 2018 luminaires.

Certified to CSA std. C22.2#250.0:2008 Ed. 3+G1;G2.

Fixtures specified with 90CRI, 2700K, 3000K, 3500K, and 4000K lamping with applicable LED drivers have the ability to conform to **California Title 24 JA8 and JA10** Appendices. EldoLED and Lutron conform to IEEE P1789 Flicker Standard: 'IEEE Recommended Practices for Modulating Current in High-Brightness LEDs for Mitigating Health Risks to Viewers.

### DECLARE

All LightPlane+ models are Declared and Red List Approved. Declare Label is a comprehensive product transparency platform designed to empower manufacturers, designers, and consumers with detailed information about the ingredients and environmental impact of building products. Managed by the International Living Future Institute (ILFI), the platform provides a standardized "nutrition label" for products, disclosing material content, sourcing details, and the end-of-life potential. This initiative supports the Living Building Challenge by promoting sustainable and healthy materials, facilitating informed choices in the architecture and construction industries, and fostering transparency and accountability in the manufacturing process.

### OPERATING TEMPERATURE

Luminaire should be installed and operated **ONLY** in dry environments where the ambient temperature ranges from -4°F to 122°F (-20°C to 50°C). Luminaire operation in environments outside the listed temperature range voids the warranty **AND** may damage the product or adversely impact lamp life, lumen output and color consistency.

### WEIGHT

Approximately 2lbs. per linear foot. Weight may vary depending on additional options selected.

### EMERGENCY OPTIONS

Emergency options are available for various applications including 10W Emergency Batteries (EMB), EMC circuits (EMC), Generator Transfer Devices (GTD), and Automated Load Control Relays (ALC). Contact ALW for emergency component spec sheets.

### EMBEDDED CONTROLS, SENSORS, & OEM COMPONENTS

ALW lighting fixtures are intended for use with a wide range of embedded OEM components (control devices, occupancy and photocell sensors, LED drivers) for use with specified building management systems. Our component portfolio is continually expanding to adopt to the latest technologies and specification needs.

ALW is your embedded controls partner, supporting integration with Acuity, Avi-on, Casambi, Cooper Wavelinx, Encelium, Enlighted, Lutron, NX Controls, Wattstopper, eldoLED, Philips, Molex PoE, NuLEDs PoE, WTEC Smartengine PoE, and more. If there's a component or system required that you don't see on the spec sheet please contact ALW customer support today so we can review your requirements.

Rev 122024