


# OPTIMA

## 4" PENDANT

Optimized for time and cost sensitive projects including tenant improvement, design-build and multi-unit residential.



### SPECIFICATIONS

<b>Light Engine:</b>	High efficiency LED module 3x3 MacAdam color consistency 55,000 hours at 70% lumen maintenance 3000K, 3500K, or 4000K CCT with 80+ CRI 117 Source lumens per watt minimum Specular reflectors in narrow, medium & wide beam spreads Reflectors are field replaceable without tools
<b>Electrical:</b>	0-10V dimming 100% - 10% Universal 100 - 277VAC, 50/60Hz input voltage Mounts to 3.5" and 4" octagonal and round boxes
<b>Construction:</b>	Extruded aluminum housings TGIC polyester powder coat Black cord, 72", field adjustable Weight 5 lbs.
<b>Compliance:</b>	ETL Listed for damp locations
<b>Warranty:</b>	5 year Limited Warranty
<b>Availability:</b>	QuickShip Eligible - Ships in 10 days or less upon order Maximum of 100 cylinders per order.

### PROJECT

**Name:**

**Type:**

**Location:**

**P/N:**




### PART NUMBER

LUMEN OUTPUT	CCT	BEAM	SHELL COLOR	CORD COLOR
<input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>
<b>OP41</b> = 1,000lm	<b>30</b> = 3000K	<b>N</b> = Narrow	<b>SW</b> = Satin White	<b>BK</b> = Black
<b>OP42</b> = 2,000lm	<b>35</b> = 3500K	<b>M</b> = Medium	<b>SB</b> = Satin Black	<b>WH</b> = White
<b>OP43</b> = 3,000lm	<b>40</b> = 4000K	<b>W</b> = Wide	<b>AS</b> = Aluminum Silver Anodized Effect	<b>CB</b> = Clear Silver Braid

### PERFORMANCE

Model	Source Lumens	Typ. Fixture Input Power	Max. Fixture Input Power	LED Efficacy	Delivered Lumens	EM Lumens (90 minutes)
OP41	1,000	7.9 W	10.5 W	146 lm/W	840 lm	840 lm
OP42	2,000	18.2 W	22.7 W	131 lm/W	1,740 lm	1,310 lm
OP43	3,000	30.8 W	34.0 W	117 lm/W	2,610 lm	1,170 lm

### DIMENSIONS

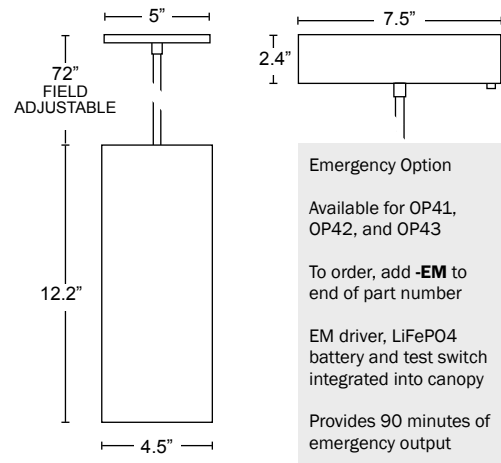

### DISTRIBUTION

