



LIGHTPLANE 11

LP11R | RECESSED



SPECIFICATIONS

PROFILE	12 9/16" or 8 3/4"
SIZES	Configurable in straight run sections
LED OUTPUT	Downlights: 800 - 4000 lm/unit Illuminated panels: 2200 - 7600 lm/panel
CCT/CRI	80/90 CRI - 3000K/3500K/4000K
DIMMING/ DRIVER	Integral and Remote Driver: 0-10V, DALI, DMX, eldoLED, Lutron®, PoE (Molex, Igor, NuLEDs). Dimming to 0% for select models.
POWER	Downlights: 5.1 – 37.7w/unit Illuminated panels: 21.2 – 73w/panel
INPUT	120VAC, 277VAC, or 347VAC
OPTICS	Lambertian distribution
FINISHES	16 powder coat finishes Custom finishes also available
MATERIAL	18 Gauge Steel Recessed
ENVIRONMENT	Dry or damp locations


DISTRIBUTIONS & PROFILES



**DIRECT
LAMBERTIAN**



**Straight Run
(S)**

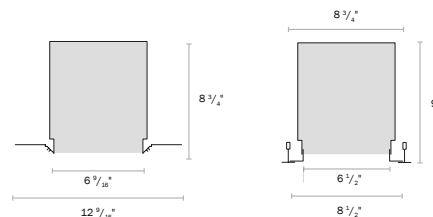

LP11RMUD
Recessed trimless

LP11RT
Recessed with trim

Not to scale. Dimensions are nominal. Consult factory for CAD drawing

*Safety and Performance information available on last page. Output and other specifications available on page 7.



enlighted

nLIGHT



molex

igor

VIVE by LUTRON

COOPER Lighting Solutions

PoE Ready



NuLEDs




PRODUCT SUBMITTAL WORKSHEET

1	2	3	4	5	6	7	8	9	10	11	12	13a	13b
---	---	---	---	---	---	---	---	---	----	----	----	-----	-----

EXAMPLE: LP11RT – S10 – DRY – DL800/80/3000K/25 – N – V00 – N – G/LOW/3500K – V00 – N – SW – UNV – EMB/25 – AY/xx

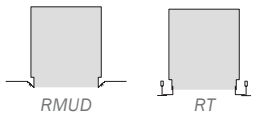1. BASE MODEL (CHOOSE 1)	2. SHAPE/LENGTH* (CH. 1 & ENTER LENGTH IN FEET)*	3. CEILING TYPE (CHOOSE 1)	4. ACCENT – DOWNLIGHT* (CH. 1 FOR EACH)																																	
<p>LP11RMUD Recessed, Trimless, Mud-In LP11RT Recessed with Trim</p>  <p>RMUD RT</p>	<p>S__ Individual/Straight Run Section <i>(enter length in product code above, ex. S5)</i></p> <p>*Lengths are nominal and may vary based on lamping and other specification selections. *Consult ALW when exact lengths are required. *Shape orientation (Looking from the Ceiling down to the floor). *For custom angles, contact alw</p>  <p>(S)</p>	<p>DRY Drywall TGRID T-Grid SLOT Slot T-Bar</p>	<p>NONE No Downlights</p> <table border="1"> <tr> <td>A. SPOT*</td> <td>B. CRI</td> <td>D. BEAM SPREAD</td> </tr> <tr> <td>DL800</td> <td>80</td> <td>25</td> </tr> <tr> <td>DL1000</td> <td>90</td> <td>40</td> </tr> <tr> <td>DL1500</td> <td></td> <td></td> </tr> <tr> <td>DL1800</td> <td>3000K</td> <td></td> </tr> <tr> <td>DL2200</td> <td>3500K</td> <td></td> </tr> <tr> <td>DL2600</td> <td>4000K</td> <td></td> </tr> <tr> <td>DL2900</td> <td></td> <td></td> </tr> <tr> <td>DL3300</td> <td></td> <td></td> </tr> <tr> <td>DL3500</td> <td></td> <td></td> </tr> <tr> <td>DL4000</td> <td></td> <td></td> </tr> </table> <p>C. CCT</p>	A. SPOT*	B. CRI	D. BEAM SPREAD	DL800	80	25	DL1000	90	40	DL1500			DL1800	3000K		DL2200	3500K		DL2600	4000K		DL2900			DL3300			DL3500			DL4000		
A. SPOT*	B. CRI	D. BEAM SPREAD																																		
DL800	80	25																																		
DL1000	90	40																																		
DL1500																																				
DL1800	3000K																																			
DL2200	3500K																																			
DL2600	4000K																																			
DL2900																																				
DL3300																																				
DL3500																																				
DL4000																																				

*For delivered lumens and watts, see *Performance Details*
 *Spot from DL1800 to DL4000 in 90CRI only.

5. ACCESSORY – ACCENT DOWNLIGHT (CH. 1)	6. DRIVER* – ACCENT DOWNLIGHT* (CHOOSE 1)	7. QUANTITY – ACCENT DOWNLIGHT (CHOOSE 1)*	8. LED ILLUMINATED PANEL* (CH. 1 FOR EACH)								
<p>N (None) HEX (Hexcell Louver) SNT (Snoot) HEXSNT (Hexcell Louver and Snoot)</p>  <p>HEXCELL LOUVER SNOOT</p>	<p>N (None) V00 (0-10V, dim to 0%) V01 (0-10V, dim to 1%) V05 (0-10V, dim to 5%) LDE1 (Lutron ECOSYS1, 0-10V, dim to 1%) DALI (DALI, dim to 0%) DMX (DMX, dim to 0%) POEM (POE Molex) POEI (POE IGOR) POEN (POE Nuleds) POE* (POE Ready)</p> <p>*See *Driver* and lamping charts for driver details and sensor compatibility. *Driver options may be limited with DL800 and DL1000 single spotlights. Driver specifications provided upon request to assist with control system integration. *Choose desired PoE solution not listed. Contact customer service to review and confirm the PoE system of your choice.</p>	<p>N (None) ___ Enter total quantity of downlights, calculated below. (Maximum 1x per linear foot of run length)</p>	<table border="1"> <tr> <td>A. MODEL</td> <td>C. CCT</td> </tr> <tr> <td>NONE</td> <td>3000K</td> </tr> <tr> <td>G (Illuminated)</td> <td>3500K</td> </tr> <tr> <td></td> <td>4000K</td> </tr> </table> <p>B. OUTPUT</p> <p>LOW MED HI</p>	A. MODEL	C. CCT	NONE	3000K	G (Illuminated)	3500K		4000K
A. MODEL	C. CCT										
NONE	3000K										
G (Illuminated)	3500K										
	4000K										

9. DRIVER – ILLUMINATED PANEL* (CHOOSE 1)	10. QUANTITY – ILLUMINATED PANEL (CHOOSE 1)	11. FINISHES* (CHOOSE 1)																				
<p>N (None) V00 (0-10V, dim to 0%) V01 (0-10V, dim to 1%) V05 (0-10V, dim to 5%) LDE1 (Lutron ECOSYS1, 0-10V, dim to 1%) DALI (DALI, dim to 0%) DMX (DMX, dim to 0%) POEM (POE Molex) POEI (POE IGOR) POEN (POE Nuleds) POE (POE Ready)</p> <p>*See *Driver* and lamping charts for driver details and sensor compatibility.</p>	<p>N (None) ___ Use the table below to indicate quantity of illuminated panels per dimension</p> <table border="1"> <thead> <tr> <th>DIMENSION</th> <th>QTY OF 2FT</th> <th>QTY OF 3FT</th> <th>QTY OF 4FT</th> </tr> </thead> <tbody> <tr> <td>A</td> <td></td> <td></td> <td></td> </tr> <tr> <td>B</td> <td></td> <td></td> <td></td> </tr> <tr> <td>C</td> <td></td> <td></td> <td></td> </tr> <tr> <td>TOTAL:</td> <td>G2/___</td> <td>G3/___</td> <td>G4/___</td> </tr> </tbody> </table> <p>(NOTE: Ensure illuminated length does not exceed available run length, each downlight requires at least 1 foot of run length).</p>	DIMENSION	QTY OF 2FT	QTY OF 3FT	QTY OF 4FT	A				B				C				TOTAL:	G2/___	G3/___	G4/___	<p>STANDARD FINISHES</p> <p>SW <input type="checkbox"/> Satin White SB <input checked="" type="checkbox"/> Satin Black AS <input type="checkbox"/> Aluminum Silver Anodized Effect TB <input checked="" type="checkbox"/> Textured Black</p> <p>PREMIUM FINISHES</p> <p>___ See chart on page 5 for premium finishes. Manually type in the finish code (Ex: OB = Oil-Rubbed Bronze)</p> <p>SPECIAL ORDER FINISHES*</p> <p>RAL___ Specify RAL Classic Color (Ex: RAL 3003) CCM___ Custom Color Match</p> <p>*Manually type in the finish code for special order finishes types</p>
DIMENSION	QTY OF 2FT	QTY OF 3FT	QTY OF 4FT																			
A																						
B																						
C																						
TOTAL:	G2/___	G3/___	G4/___																			

CONTINUES ON NEXT PAGE





PRODUCT SUBMITTAL WORKSHEET

12. VOLTAGE (CHOOSE 1)	13a. EMERGENCY OPTIONS (OPTIONAL, CH. 1)	13b. CONTROL OPTIONS* (OPTIONAL)
UNV Universal Voltage (120VAC-277VAC) 347 347 Volt (Driver options may be limited. Not available with EMB)	EMB/___ ³ Emergency Battery (indicate QTY – each battery powers 4ft. section @ 1492lm. Not available in 347 V) EMC/___ ³ Emergency Circuit (indicate QTY of 4ft sections to be illuminated by emergency circuit)	N None FACTORY CONTROLS OS/PH/INT/___ Integral Occupancy/Daylight sensor OS/PH/HV/___ Remote Occupancy/Daylight sensor NETWORK CONTROLS <i>Embedded controls below are placeholder specs. See the ALW Controls Guide to finalize your final control spec.</i> AY/xx Acuity AN/xx Avi-on CA/xx Casambi CW/xx/___ Cooper Wavelinx EC/xx/___ Encelium EN/xx/___ Enlighted LU/xx/___ Lutron NX/xx/___ NX Controls WA/xx/___ Wattstopper <small>*Quickship availability on occupancy and photocell daylight sensors may vary. Contact ALW for more information. *Contact ALW for Additional Zone specifications</small>

³Consult ALW for available options.



MECHANICAL DIAGRAMS – MOUNTING & DIMENSIONS

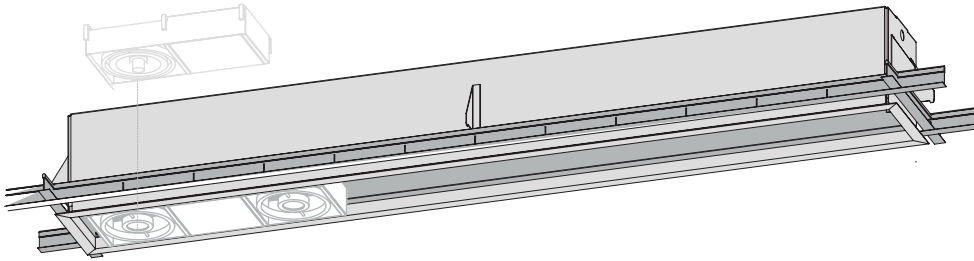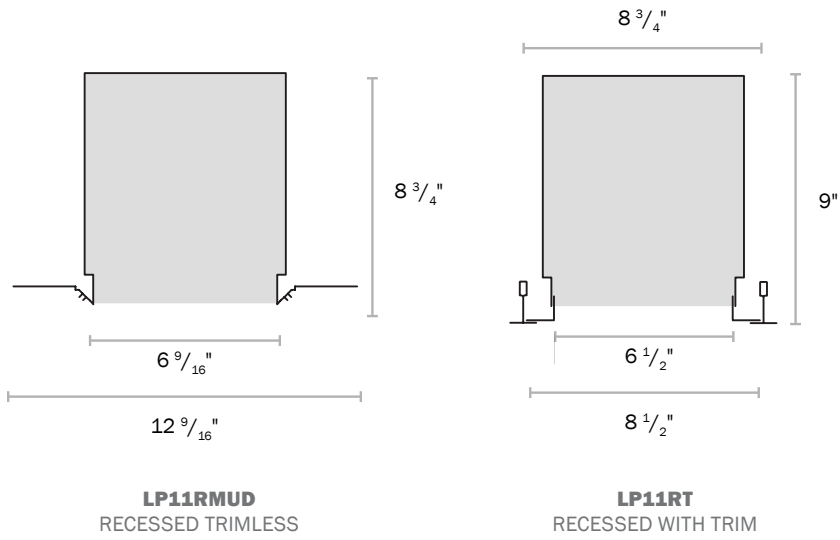

POWER SUPPLY IS ON BOARD WITH DOWNLIGHT



FINISHES

Standard finishes are available at no additional charge.

STANDARD FINISHES




PREMIUM FINISHES

BASIC POWDER COAT




METALLIC POWDER COAT

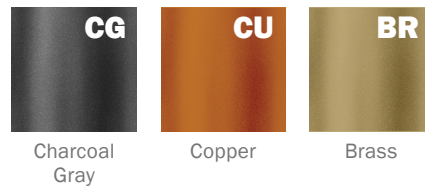

SATIN ANODIZED EFFECT POWDER COAT



GLOSS POWDER COAT (80-95% GLOSS)

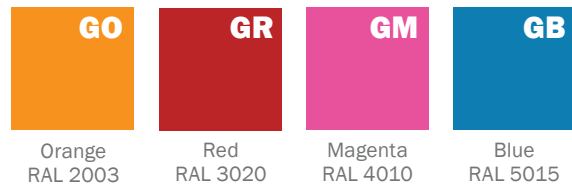

Contact ALW Quotes for sample paint finish swatches.

SPECIAL ORDER FINISHES*



RAL CLASSIC COLORS (80-95% GLOSS): RAL_ _ _ _

Most RAL Classic Colors are available for a minimum setup fee. On your specification submittal choose your RAL color by entering the 4-digit RAL code (Ex: RAL 3003). See www.alw-inc.com/resources/finishes



CUSTOM COLOR MATCH: CCM_ _ _ _

Custom powder coat color matching is available for a premium setup fee. Consult ALW for additional information.

*An individual setup fee will apply to each unique Special Order Finish per purchase order. (ex: RAL 5023 and RAL 2008 are specified for multiple line items on a purchase order. 2x setup fees will apply)


*Printed or on-screen colors are only approximations - consult actual Color Chip Set before specifying



PERFORMANCE DETAILS — DOWNLIGHTING

SPOT	DELIVERED LUMENS (LM)	WATTS (W)	EFFICACY (LM/W)	CRI	CCT OPTIONS	BEAM SPREAD OPTIONS (DEGREES)
DL800	800	5.1	157	80	3000K 3500K 4000K	25 40
DL1000	1000	6.7	150			
DL1500	1500	10.5	143			
DL1800	1800	8.2	220	90		
DL2200	2200	15.8	140			
DL2600	2600	19.8	132			
DL2900	2900	24.9	117			
DL3300	3300	22.4	148			
DL3500	3500	27.1	130			
DL4000	4000	37.7	107			

AIMING



Accent downlights are able to be aimed 25° in the perpendicular direction, and 35° in the parallel direction (with respect to the channel).

**DL800
DL1000
DL1500**



**DL1800
DL2200
DL2600
DL2900**



**DL3300
DL3500
DL4000**




*Performance calculations are based on 80 CRI/3500K for DL800-DL1500, and 90 CRI/3500K for DL1800-DL4000.



PERFORMANCE DETAILS — ILLUMINATED PANELS

PANEL LENGTH	OUTPUT	DELIVERED LUMENS (LM)	WATTS (W)	EFFICACY (LM/W)	CRI	CCT OPTIONS
G2 (2FT)	LOW	2200	21.2	104	80	3000K 3500K 4000K
	MED	3000	28.8			
	HI	3800	36.4			
G3 (3FT)	LOW	3300	31.6			
	MED	4500	43.1			
	HI	5700	54.6			
G4 (4FT)	LOW	4400	42.2			
	MED	6000	57.6			
	HI	7600	73.0			

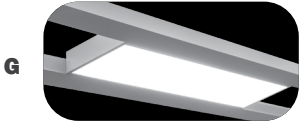

*Performance calculations tested with 80 CRI 4000K panels.



DRIVERS

PRODUCT CODE	DESCRIPTION
V00	0-10V dimming down to 0% (dim to off).
V01	0-10V dimming down to 1%.
V05	0-10V dimming down to 5% (Down to 10% for TUNE lamping).
LDE1	(LDE1) Lutron Hi-lume 1% EcoSystem LED driver with Soft-on, Fade-to-Black dimming technology.
DALI	DALI flicker-free dimming down to 0%.
DMX	DMX flicker-free dimming down to 0%.
POEM	Molex CoreSync PoE LED Driver. Contact ALW to assist with your project.
POEI	IGOR PoE LED Driver. Contact ALW to assist with your project.
POEN	NuLEDS PoE LED Driver. Contact ALW to assist with your project.
POE	PoE Ready LED Driver. Contact ALW to assist with your project.

*Most drivers can be programmed to specific dimming levels if desired. Contact ALW for specific dimming level requests. ALW lighting fixtures are intended for use with a wide range of sensors, lighting controls, LED drivers, and building management systems. If there are specific components required for your application that aren't listed on this spec sheet, please contact ALW customer support today to specify a compatible solution of your choice.

DRIVER/LED LAMPING COMPATIBILITY			
	STD	CA TITLE 24 JA8/JA10 ⁶	IEEE P1789 & HD TV STUDIO ⁷
V00	●	●	
V01	●	●	
V05	●	●	
LDE1	●	●	●
DALI	●	●	
DMX	●	PER REQUEST	PER REQUEST
POEM	PER REQUEST	●	●
POEI	PER REQUEST	●	●
POEN	PER REQUEST	●	●

● - Indicates compatibility


*Standard lamping (STD) – LOW/MED/HI

⁶Fixtures specified with 90CRI, 3000K, 3500K, and 4000K lamping with applicable LED drivers have the ability to conform to California Title 24 JA8 and JA10 Appendices

⁷The following drivers conform to IEEE P1789 Flicker Standard: 'IEEE Recommended Practices for Modulating Current in High-Brightness LEDs for Mitigating Health Risks to Viewers'. These drivers may also be installed in HD TV Studio applications utilizing high frequency camera equipment.



PHOTOMETRICS

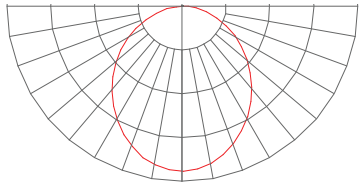OPTIC	POLAR PLOT (CD)	MTG HEIGHT	LIGHT LEVEL (FC)	SPACING CRITERION (SC) ⁸ (0° - 180°) (90° - 270°)	MAX INTENSITY (CD)	OUTPUT (LM/FT)
DIFF		6 ft	42.9	1.16 1.18	1546.1	1900
		8 ft	24.2			
		10 ft	15.5			
		12 ft	10.7			
		14 ft	7.9			
		16 ft	6			

*Photometric calculations based on HI 4000K 80 CRI 2FT PANEL fixture combination. Actual results may vary in the field.

For footcandle and output multipliers refer to the [ALW IES File Multipliers Chart](#)

⁸Spacing criterion refers to maximum distance luminaires can be spaced to provide uniform illumination on the working plane or surface.

Luminaire spacing = Spacing Criterion (SC) x Mounting Height (MH) (ex. 1.14 (SC) x 10' (MH) = 11.4' Luminaire Spacing).



ADDITIONAL OPTIONS & SPECIFICATIONS

LED PERFORMANCE

LED drivers are Class 2, L80 > 50,000 hours.
80+ CRI. Luminous flux +/- 5%.

LINEAR LENS

White opal acrylic with minimal- to no-source-visibility.

HOUSING

18 Gauge Steel metal recessed housing.

SAFETY & REGULATORY

Fixtures specified with 90CRI, 3000K, 3500K, and 4000K lamping with applicable LED drivers have the ability to conform to **California Title 24 JA8 and JA10** Appendices. EldoLED drivers can conform to IEEE P1789 Flicker Standard: 'IEEE Recommended Practices for Modulating Current in High-Brightness LEDs for Mitigating Health Risks to Viewers' .

Contact [ALW customer support](#) today and we can help you with your project requirements.

ETL Listed (U.S. & Canada).

For integral driver: Conforms to UL std. 1598, Luminaires. Certified to CSA std. C22.2#250.0:2008 Ed. 3+G1;G2.

For remote driver: Conforms to UL std. 2108, Luminaires. Certified to CSA std. C22.2#9.0:1996 Ed. 1+S1.

OPERATING TEMPERATURE

Luminaire should be installed and operated ONLY in dry or damp locations where the ambient temperature ranges from -4 °F to 122 °F (-20 °C to 50 °C). Luminaire operation in environments outside the listed temperature range voids the warranty AND may damage the product or adversely impact lamp life, lumen output and color consistency.

WARRANTY

Limited 11 year warranty. Details: alw-inc.com/warranty

CONTROLS, SENSORS, & LED DRIVER

ALW lighting fixtures are intended for use with a wide range of sensors, lighting controls, LED drivers, and building management systems. Our component portfolio is continually expanding to adopt to the latest technologies and specification needs. We currently support integration with Lutron, Enlighted, nLight, Cooper Wavelinx, eldoLED, Molex PoE, NuLEDS PoE, Igor PoE, Osram, Philips, and more. If there's a component or system needed that you don't see on the spec sheet please contact [ALW customer support](#) today so we can review your requirements.

WEIGHT

Approximately 3.5lbs. per linear foot (not including downlight option). Weight may vary depending on mounting, downlight, and additional options selected.