


OPTIMA 6" PENDANT

Optimized for time and cost sensitive projects including tenant improvement, design-build and multi-unit residential.



SPECIFICATIONS

Light Engine: High efficiency LED module
 3x3 MacAdam color consistency
 55,000 hours at 70% lumen maintenance
 3000K, 3500K, or 4000K CCT with 80+ CRI
 117 Source lumens per watt minimum
 Specular reflectors in narrow, medium & wide beam spreads
 Reflectors are field replaceable without tools


Electrical: 0-10V dimming 100% - 10%
 Universal 100 - 277VAC, 50/60Hz input voltage
 Mounts to 3.5" and 4" octagonal and round boxes

Construction Extruded aluminum housings
 TGIC polyester powder coat
 Black cord, 72", field adjustable
 Weight 8 lbs.

Compliance: ETL Listed for damp locations

Warranty: 5 year Limited Warranty

Availability: QuickShip Eligible - Ships in 10 days or less upon order entry.
 Maximum of 100 cylinders per order.



PROJECT

Name:

Type:

Location:

P/N:




PART NUMBER

LUMEN OUTPUT	CCT	BEAM	SHELL COLOR	CORD COLOR
<input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>
OP61 = 1,000lm	30 = 3000K	N = Narrow	SW = Satin White	BK = Black
OP62 = 2,000lm	35 = 3500K	M = Medium	SB = Satin Black	WH = White
OP63 = 3,000lm	40 = 4000K	W = Wide	AS = Aluminum Silver Anodized Effect	CB = Clear Silver Braid


PERFORMANCE

Model	Source Lumens	Typ. Fixture Input Power	Max. Fixture Input Power	LED Efficacy	Delivered Lumens	EM Lumens (90 minutes)
OP61	1,000	7.9 W	10.5 W	146 lm/W	840 lm	840 lm
OP62	2,000	18.2 W	22.7 W	131 lm/W	1,740 lm	1,310 lm
OP63	3,000	30.8 W	34.0 W	117 lm/W	2,610 lm	1,170 lm

DISTRIBUTION

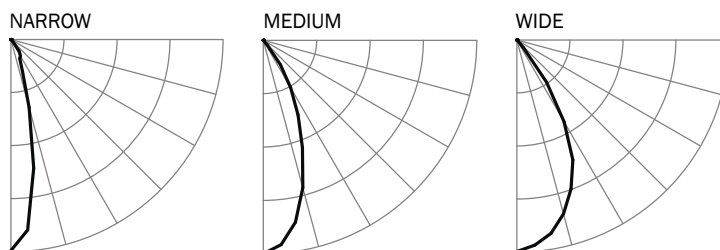

DIMENSIONS

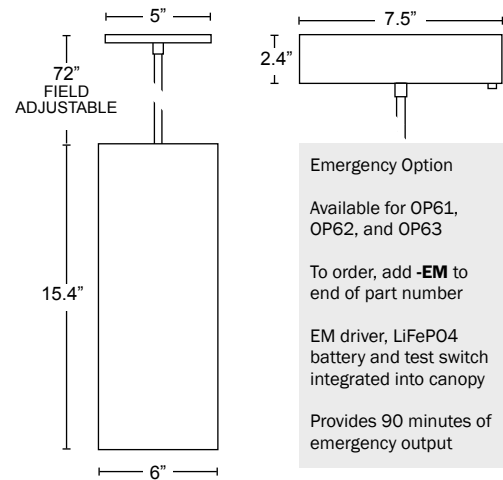

Emergency Option
 Available for OP61, OP62, and OP63
 To order, add **-EM** to end of part number
 EM driver, LiFePO4 battery and test switch integrated into canopy
 Provides 90 minutes of emergency output