


OPTIMA


4" SURFACE MOUNT



Optimized for time and cost sensitive projects including tenant improvement, design-build and multi-unit residential.

SPECIFICATIONS

- Light Engine:** High efficiency LED module
 3x3 MacAdam color consistency
 55,000 hours at 70% lumen maintenance
 3000K, 3500K, or 4000K CCT with 80+ CRI
 117 Source lumens per watt minimum
 Specular reflectors in narrow, medium & wide beam spreads
 Reflectors are field replaceable without tools
- Electrical:** 0-10V dimming 100% - 10%
 Universal 100 - 277VAC, 50/60Hz input voltage
 Mounts to 3.5" and 4" octagonal and round boxes
- Construction:** Extruded aluminum housings
 TGIC polyester powder coat
 Weight 5 lbs.
- Compliance:** ETL Listed for damp locations
- Warranty:** 5 year Limited Warranty
- Availability:** QuickShip Eligible - Ships in 10 days or less upon order entry
 Maximum of 100 cylinders per order.



PROJECT

Name:

Type:

Location:

P/N:




PART NUMBER

LUMEN OUTPUT	CCT	BEAM	SHELL COLOR
<input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>
OM41 = 1,000lm	30 = 3000K	N = Narrow	SW = Satin White
OM42 = 2,000lm	35 = 3500K	M = Medium	SB = Satin Black
OM43 = 3,000lm	40 = 4000K	W = Wide	AS = Aluminum Silver Anodized Effect


PERFORMANCE

Model	Source Lumens	Typ. Fixture Input Power	Max. Fixture Input Power	LED Efficacy	Delivered Lumens	EM Lumens (90 minutes)
OM41	1,000	7.9 W	10.5 W	146 lm/W	840 lm	840 lm
OM42	2,000	18.2 W	22.7 W	131 lm/W	1,740 lm	1,310 lm
OM43	3,000	30.8 W	34.0 W	117 lm/W	2,610 lm	1,170 lm

DISTRIBUTION

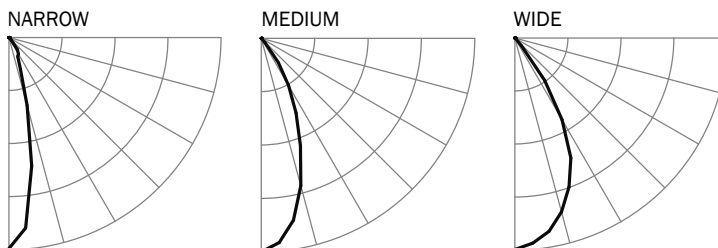

DIMENSIONS

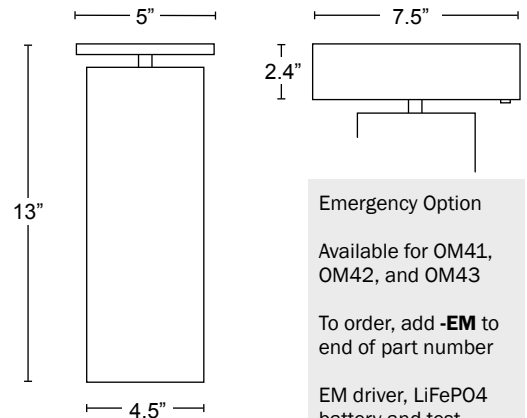

Emergency Option

Available for OM41, OM42, and OM43

To order, add **-EM** to end of part number

EM driver, LiFePO4 battery and test switch integrated into canopy

Provides 90 minutes of emergency output