



LIGHTPLANE+ 2P


LPX2P | RECESSED PERIMETER



SPECIFICATIONS

PROFILE	2" Aperture, 3 1/4" height
SIZES	Individual/Straight Run sections starting at 2ft. Continuous runs & shapes
LED OUTPUT	350lm/ft - 1,500lm/ft, up to 169 lm/ft
CCT/CRI	2700K/3000K/3500K/4000K/5000K • 80 or 90+ CRI Tunable White (2700K - 6500K) • RGB and RGB+W
DIMMING/DRIVER	Integral and Remote Driver: 0-10V, Phase, DALI, DMX, eldoLED, Lutron®, PoE (Molex, NuLEDS, WTEC Smartengine). Dimming to 0% for select models.
EMBEDDED CONTROLS	Acuity nLight, Avi-on, Casambi, Cooper Wavelinx, Encelium, Enlighted, Lutron Athena, Lutron Vive, NX Controls, Wattstopper, and more
POWER	3W - 12.2W per ft
INPUT	120VAC, 277VAC, or 347VAC
OPTICS	Lambertian, Low Glare (UGR < 16), Asymmetric, Widespread
LENS	Standard Snap-in & ControlRoll Flush, Regressed
FINISHES	16 powder coat finishes - Custom finishes also available
MATERIAL	6063-T6 Extruded Aluminum, See Declare listing here
ENVIRONMENT	Dry or damp locations
WARRANTY	11 years
WELL/UGR	See ALW WELL and BIOS pages for recommended options that contribute to meeting the WELL Building Standard™

DISTRIBUTIONS & PROFILES

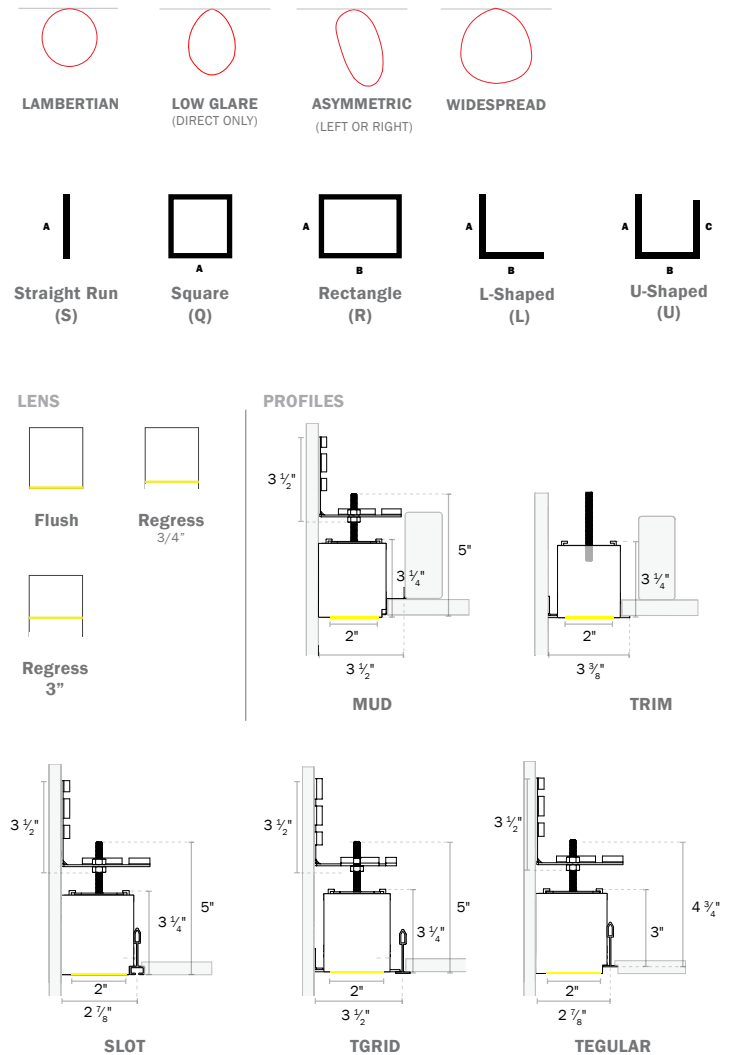

Not to scale. Dimensions are nominal. Consult factory for CAD drawing





PRODUCT SPECIFICATION SHEET

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----


EXAMPLE: LPX2PMDFN – S8 – 053090SLV00 – SW – N – UNV – EMC/2 – N – CP – DC

1. FAMILY	2. SIZE	3. MODEL (CHOOSE 1)	4. MOUNTING (CHOOSE 1)	5. LENS TYPE (CHOOSE 1)
LPX Lightplane [†]	2 2"	P Recessed Perimeter Direct	MD Mud TM ^{1,2} Trim ST Slot T9 TGrid 9/16 T5 TGrid 15/16 G9 Tegular 9/16 G5 Tegular 15/16 AW ^{2,3} Armstrong Woodworks® AM ^{2,3} Armstrong Metalworks®	FN Flush Lens RN Regress Lens (3/4") GN Regress Lens (3") CN ControlRoll Flush Lens* <i>Select for Widespread & Asymmetric Optics</i>

¹For install in wood, drywall, metal, etc.
²Not compatible with 3" regressed lens option (R3)
³All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them.

6. SHAPE/LENGTH* (CHOOSE 1 & ENTER LENGTH IN FEET) - FOR CUSTOM ANGLES, CONTACT ALW	7. LUMENS* (CHOOSE 1)	8. CCT (CHOOSE 1)
S ___ Individual/Straight Run Section (enter length in product code above, ex. S18) Q ___ Square Configuration (enter side length A, ex. Q18) R ___/___ Rectangular Configuration (enter side lengths A and B, ex. R12/24) L ___/___ L-Shaped Configuration (enter side lengths A and B, ex. L12/24) U ___/___/___ U-Shaped Configuration (enter side lengths A, B, and C, ex. U12/12/24)	03 350lm/ft 05 500lm/ft 07 750lm/ft 10 1000lm/ft 12 1200lm/ft 15 ⁴ 1500lm/ft RB RGB RW RGB + 3500K White, 80CRI BO /____ ⁵ BIOS. 80 CRI Choose your lm/ft CM /____ ⁶ Custom Lumens. Write in your lumens/ft (ex: 0100 = 100lm/ft).	N Choose for RB, RW, or BO 27 ⁷ 2700K 30 3000K 35 3500K 40 4000K 50 ⁸ 5000K TW ⁹ Tunable White, 90CRI, 2700K - 6500K

*Lengths greater than 8' consist of multiple individual housing sections joined together. Lengths are nominal and may vary based on lamping and other specification selections. Consult ALW when exact lengths are required.



Shape orientation (Looking from the Ceiling down to the floor).

⁷2700K only available in 90CRI
⁸5000K only available in 80CRI
⁹Tunable White (TW) not available with BIOS. BIOS has its own tunable white option to be specified by request.
[†]For delivered lumens and watts, see 'Performance Details'
⁴1500lm/ft option only available with Control Roll lenses
⁵Contact ALW for specific BIOS specifications
⁶Custom lumens available from 100 - 1500lm/ft

9. CRI (CHOOSE 1)	10. OPTICS* (CHOOSE 1)	11. DRIVER* (CHOOSE 1)	12. FINISH* (CHOOSE 1)
N Choose for RB, RW, or TW 80 80 90 90	SL ¹⁰ Standard Lambertian LG ¹⁰ Low Glare CONTROLROLL LENS ONLY AL ¹¹ Asymmetric Left (outside of shape) AR ¹¹ Asymmetric Right (inside of shape) WS Widespread ¹⁰ See LEED + WELL guide for optic/output combos that fall under standard UGR and intensity levels ¹¹ Regress (RN,GN) lens is only available with Low Glare (LG) and Standard Lambertian (SL) lens types. See page 4 for LED Optics Compatibility. ¹² See page 4 for explanation of Asymmetric lens specification	V00 0-10V, dim to 0% V01 0-10V, dim to 1% LDE Lutron LDE1 Ecosystem, dim to 1% P01 ¹² ELV/TRIAC phase dim to 1% TSE ¹³ Lutron T-Series Driver ELO eldoLED, 0-10V dim to 0% DAL DALI, dim to 0% DMX ¹⁴ DMX, dim to 0% POE ¹⁵ POE Ready CM ¹⁶ Custom driver	STANDARD FINISHES SW <input type="checkbox"/> Satin White SB <input checked="" type="checkbox"/> Satin Black AS <input type="checkbox"/> Aluminum Silver Anodized Effect TB <input checked="" type="checkbox"/> Textured Black PREMIUM FINISHES --- See chart on page 9 for premium finishes. Manually type in the finish code (Ex: OB = Oil-Rubbed Bronze) SPECIAL ORDER FINISHES* RAL ____ Specify RAL Classic Color (Ex: RAL 3003) CCM ____ Custom Color Match





¹³See 'Driver' and lamping charts for driver details
¹²Phase dim drivers are 120 VAC only
¹³For Tunable White (TW) CCT only
¹⁴DMX option is only Declare classified, not Red List Free
¹⁵Contact ALW with the POE spec details
¹⁶Contact ALW for custom driver specifications

*Manually type in the finish code for special order finishes types



PRODUCT SPECIFICATION SHEET CONT'D

13. MOUNTING DETAILS (CHOOSE 1)	14. VOLTAGE (CHOOSE 1)	15. EMERGENCY CIRCUITS (OPTIONAL)	16. CONTROL OPTIONS* (OPTIONAL)
<p>N None. Choose for straight sections</p> <p>I Inside Edge. Light is mounted to inner corners/walls</p> <p>O Outside Edge. Light is mounted to outer corners/walls</p>	<p>UNV Universal Voltage (120VAC-277VAC)</p> <p>347 347 Volt (<i>Driver options may be limited. Not available with EMB</i>)</p>	<p>N None</p> <p>EMC/___¹⁷ Emergency power feed whip for connection to remote Generator Transfer Devices (<i>Specify 1x for every 4ft or contact ALW for longer runs</i>)</p> <p>EMB/___ 10W Integral Emergency Battery (<i>Specify 1x for every 4ft of emergency lighting</i>)</p> <p>GTD/___ Integral Generator Transfer Device/Switch Bypass - 3A (<i>Specify 1x for every 4ft</i>)</p> <p>ALC/___ Integral Automated Load Control Relay - 10A (<i>Specify 1x for every 4ft or contact ALW for longer runs</i>)</p>	<p>N None</p> <p>FACTORY CONTROLS</p> <p>OS/PH/INT/___ Integral Occupancy/Daylight sensor</p> <p>OS/PH/HV/___ Remote Occupancy/Daylight sensor</p> <p>NETWORK CONTROLS <i>Embedded controls below are placeholder specs. See the ALW Controls Guide to finalize your final control spec.</i></p> <p>AY/xx Acuity</p> <p>AN/xx Avi-on</p> <p>CA/xx Casambi</p> <p>CW/xx/___ Cooper Wavelinx</p> <p>EC/xx/___ Encelium</p> <p>EN/xx/___ Enlighted</p> <p>LU/xx/___ Lutron</p> <p>NX/xx/___ NX Controls</p> <p>WA/xx/___ Wattstopper</p>
 <p>(I)</p>  <p>(O)</p>		<p>¹⁷No EM components provided. Choose None when designating entire fixture for EMC. When 4ft EMC sections are chosen, the power whip will be labeled as an EMC whip.</p>	<p>*Contact ALW for Additional Zone specifications</p>


17. ADDITIONAL OPTIONS - A (OPTIONAL)	18. ADDITIONAL OPTIONS - B* (INCLUDED)
<p>N None</p> <p>CP Chicago Plenum</p>	<p>DC Living Building Challenge Declared and Red List Approved</p>
	<p>*See Declare page for LP+ Declare listing</p>



LENS & OPTICS COMPATIBILITY

		OPTICS			
		STANDARD LAMBERTIAN (SL)	LOW GLARE (LG)	ASYMMETRIC (AL, AR)	WIDESPREAD (WS)
LENS TYPES	FLUSH (FN)	●	●		
	CONTROLROLL FLUSH (CN)	●	●	●	●
	REGRESSED 3/4" (RN)	●	●		
	REGRESSED 3" (GN)	●	●		

ASYMMETRIC LEFT (AL)

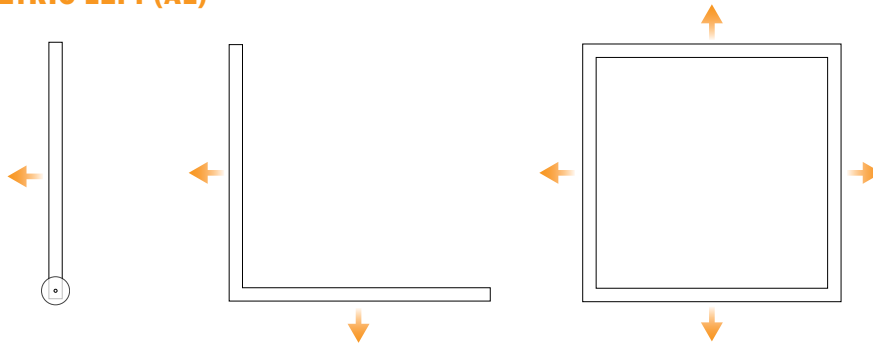


Note: For unique applications, mark up the submittal drawings for desired asymmetric light throw.

Straight Sections
Light is thrown to left of the powerfeed
(Can be reconfigured in field)

Shapes
Light is thrown outside the shape
(Cannot be reconfigured in the field because of mitered cuts)

ASYMMETRIC RIGHT (AR)

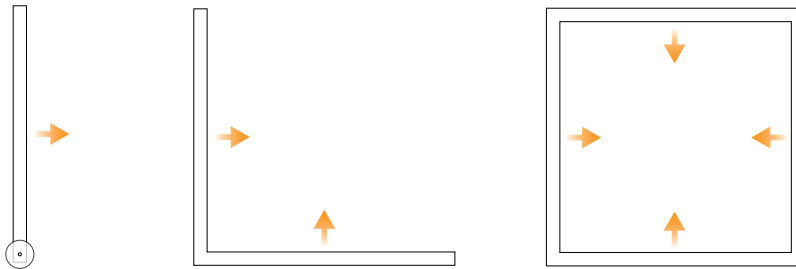

Straight Sections
Light is thrown to right of the powerfeed
(Can be reconfigured in field)


Shapes
Light is thrown inside the shape
(Cannot be reconfigured in the field because of mitered cuts)




LENS DETAILS

Applicable to all models


— FIXTURE BODY — LENS




FN
FLUSH



CN
CONTROL ROLL FLUSH




RN
REGRESS LENS




GN
3" REGRESS LENS


MECHANICAL DIAGRAMS

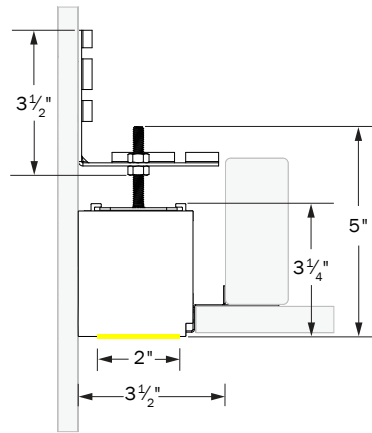


LPX2PMDFN
RECESSED PERIMETER MUD-IN
FLUSH LENS

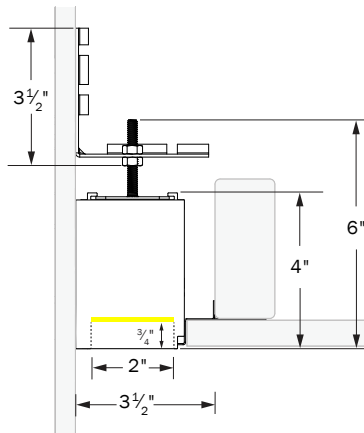


LPX2PMDRN
RECESSED PERIMETER MUD-IN
REGRESSED LENS

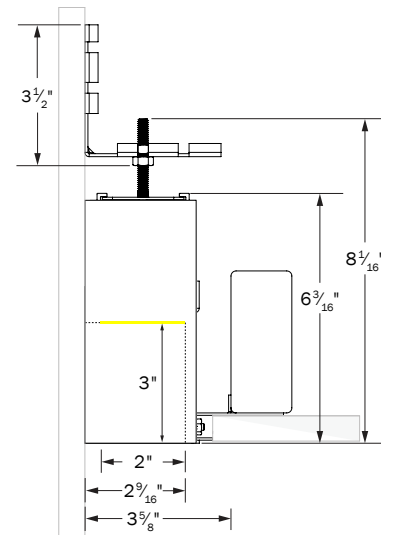


LPX2PMDGN
RECESSED PERIMETER MUD-IN
3" REGRESSED LENS

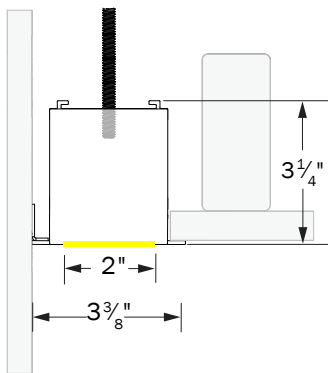

LPX2PTMFN
RECESSED PERIMETER TRIM
FLUSH LENS

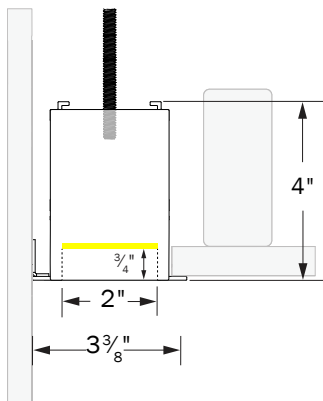

LPX2PTMRN
RECESSED PERIMETER TRIM
REGRESSED LENS

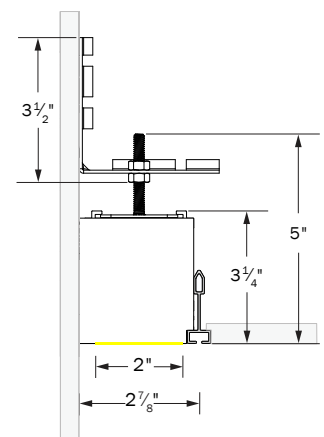


LPX2PSLFN
RECESSED PERIMETER SLOT
FLUSH LENS


Rev 122024




MECHANICAL DIAGRAMS CONT'D

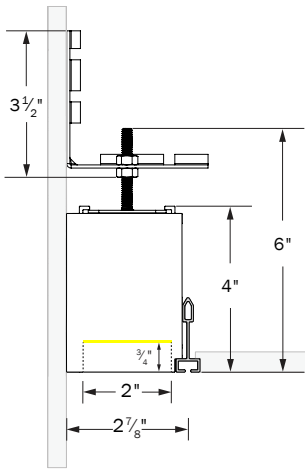


LPX2PSLRN
RECESSED PERIMETER SLOT
REGRESSED LENS

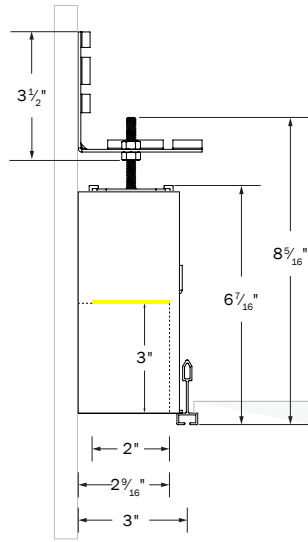


LPX2PSLGN
RECESSED PERIMETER SLOT
3" REGRESSED LENS

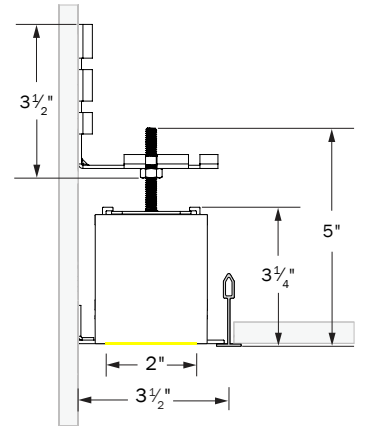


LPX2PT9FN
RECESSED PERIMETER TGRID 9/16
FLUSH LENS

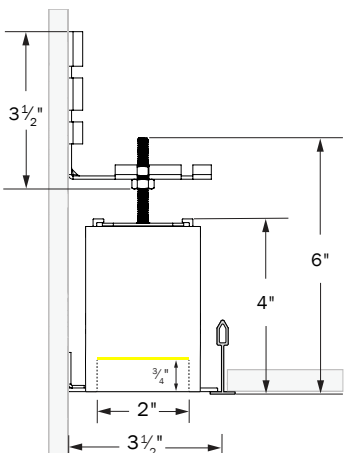

LPX2PT9RN
RECESSED PERIMETER TGRID 9/16
REGRESSED LENS

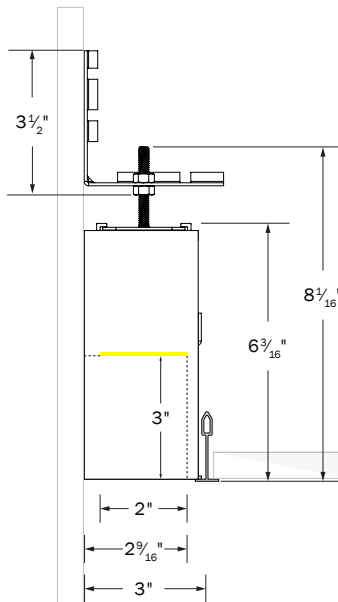


LPX2PT9GN
RECESSED PERIMETER TGRID 9/16
3" REGRESSED LENS

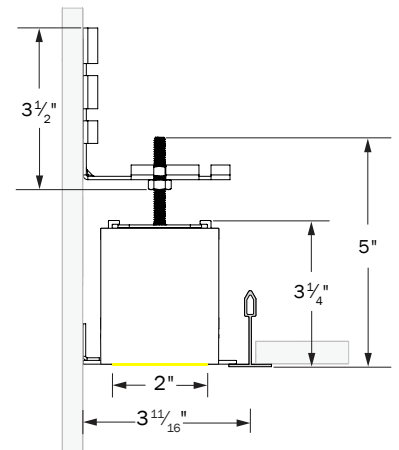


LPX2PT5FN
RECESSED PERIMETER TGRID 15/16
FLUSH LENS




MECHANICAL DIAGRAMS CONT'D

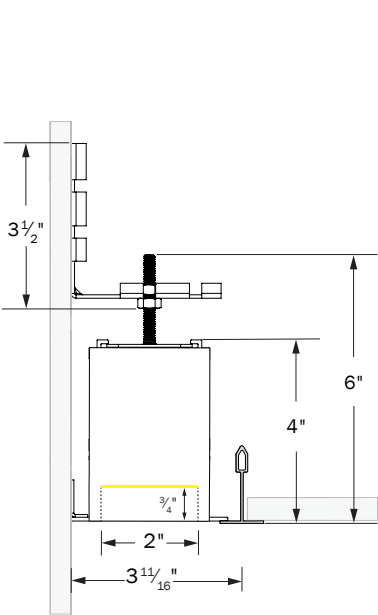


LPX2PT5RN
RECESSED PERIMETER TGRID 15/16
REGRESSED LENS

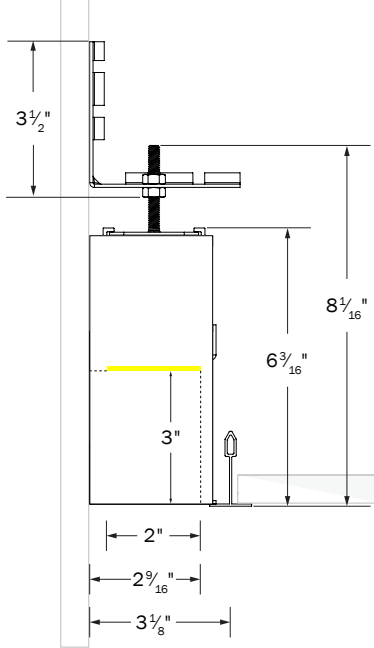


LPX2PT5GN
RECESSED PERIMETER TGRID 15/16
3" REGRESSED LENS

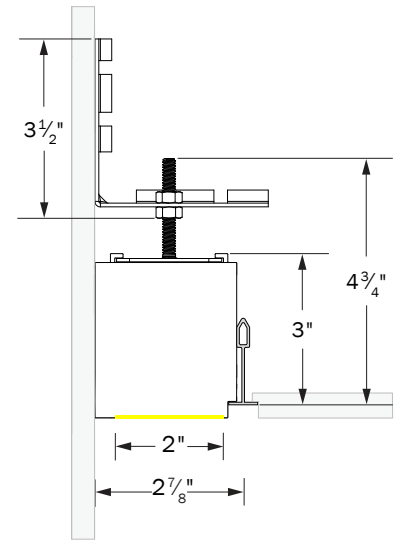


LPX2PG9FN
RECESSED PERIMETER
TEGULAR 9/16
FLUSH LENS

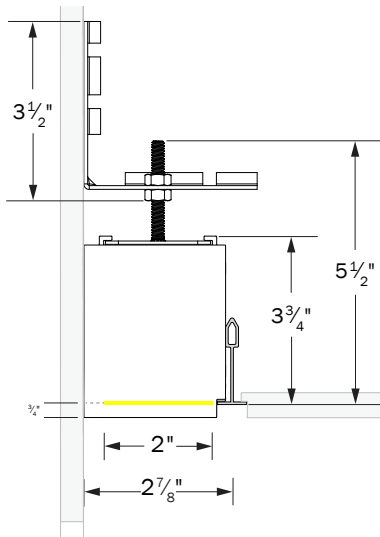

LPX2PG9RN
RECESSED PERIMETER
TEGULAR 9/16
REGRESSED LENS

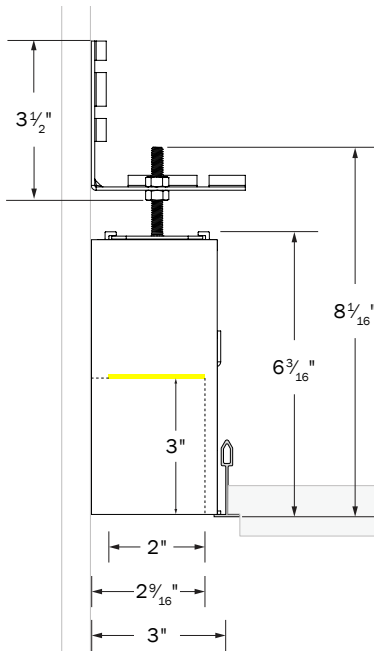

LPX2PG9GN
RECESSED PERIMETER
TEGULAR 9/16
3" REGRESSED LENS

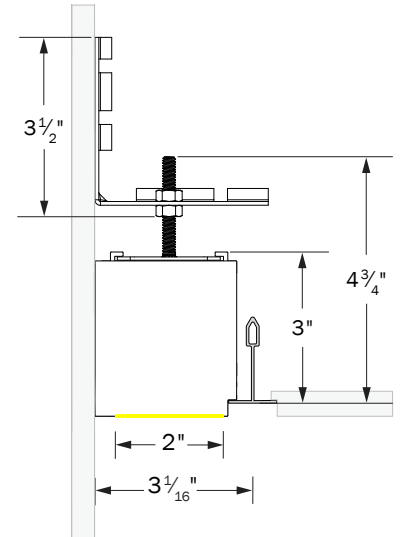


LPX2PG5FN
RECESSED PERIMETER
TEGULAR 15/16
FLUSH LENS


Rev 122024



MECHANICAL DIAGRAMS CONT'D

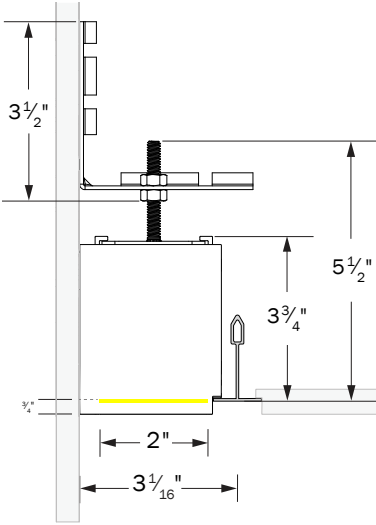

LPX2PG5RN
RECESSED PERIMETER
TEGULAR 15/16
REGRESSED LENS

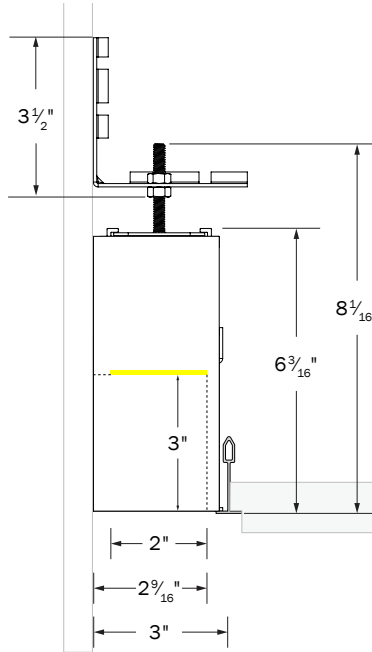


LPX2PG5GN
RECESSED PERIMETER
TEGULAR 15/16
3" REGRESSED LENS



FINISHES

Standard finishes are available at no additional charge.

STANDARD FINISHES - QS ELIGIBLE

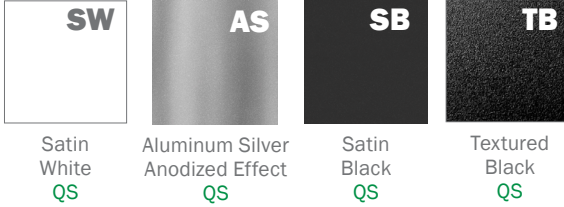


PREMIUM FINISHES

BASIC POWDER COAT




METALLIC POWDER COAT

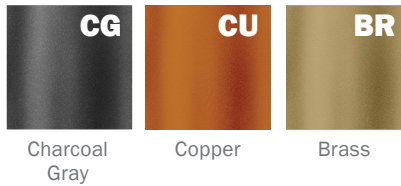

SATIN ANODIZED EFFECT POWDER COAT



GLOSS POWDER COAT (80-95% GLOSS)

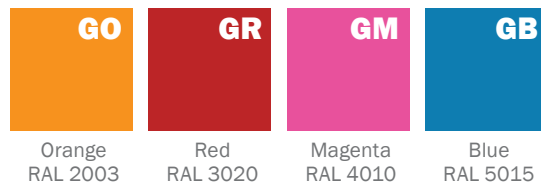

Contact ALW Quotes for sample paint finish swatches.

SPECIAL ORDER FINISHES*



RAL CLASSIC COLORS (80-95% GLOSS): RAL_ _ _ _

Most RAL Classic Colors are available for a minimum setup fee. On your specification submittal choose your RAL color by entering the 4-digit RAL code (Ex: RAL 3003). See www.alw-inc.com/resources/finishes



CUSTOM COLOR MATCH: CCM_ _ _ _

Custom powder coat color matching is available for a premium setup fee. Consult ALW for additional information.

*An individual setup fee will apply to each unique Special Order Finish per purchase order.
(ex: RAL 5023 and RAL 2008 are specified for multiple line items on a purchase order. 2x setup fees will apply)

*Printed or on-screen colors are only approximations - consult actual Color Chip Set before specifying



PERFORMANCE DETAILS - STANDARD LENSES

OUTPUT OPTION	OPTIC TYPE	DELIVERED LUMENS/FT	EFFICACY (LM/W)	WATTS/FT ¹⁸	CRI OPTIONS	CCT OPTIONS
03¹⁹	SL	359	119	3	80+ 90+	2700K 3000K 3500K 4000K 5000K
	LG	416	138			
	SL (3/4" Regress)	369	123			
	LG (3/4" Regress)	306	102			
	SL (3" Regress)	290	97			
	LG (3" Regress)	155	51			
05¹⁹	SL	511	117	4.4	80+ 90+	2700K 3000K 3500K 4000K 5000K
	LG	593	136			
	SL (3/4" Regress)	526	121			
	LG (3/4" Regress)	435	100			
	SL (3" Regress)	414	95			
	LG (3" Regress)	220	51			
07¹⁹	SL	764	122	6.3	80+ 90+	2700K 3000K 3500K 4000K 5000K
	LG	887	141			
	SL (Regress)	787	125			
	LG (Regress)	651	104			
	SL (3" Regress)	619	99			
	LG (3" Regress)	329	52			
10¹⁹	SL	1008	112	9	80+ 90+	2700K 3000K 3500K 4000K 5000K
	LG	1170	130			
	SL (Regress)	1038	115			
	LG (Regress)	859	95			
	SL (3" Regress)	816	91			
	LG (3" Regress)	434	48			
12¹⁹	SL	1204	110	11	80+ 90+	2700K 3000K 3500K 4000K 5000K
	LG	1398	127			
	SL (Regress)	1240	113			
	LG (Regress)	1026	94			
	SL (3" Regress)	975	89			
	LG (3" Regress)	519	47			
TUNE	SL (Warm White)	921	65	14.2	90	2700K - 6500K
	SL (Cool White)	977	69			
RGB²⁰	SL	184	39	4.7	N/A	
RGBW²⁰	SL	W: 177 RGB: 184	53	6.8	W: 80 CRI	W: 3500K

¹⁸ Lumens/Watt and Watts/ft have been calculated assuming a driver efficiency of 85%. Depending on field conditions, actual measured values may fluctuate by 5-8%.

¹⁹ Performance calculations are based on LM-79 test of 1200lm output at 80 CRI and 3500K. All other output calculations are extrapolated values.

²⁰ Performance calculations are derived from LM-79 test with all RGB LEDs illuminated (Red, Green, Blue) and White LED only illuminated



PERFORMANCE DETAILS - CONTROLROLL

OUTPUT OPTION	OPTIC TYPE	DELIVERED LUMENS/FT	EFFICACY (LM/W)	WATTS/FT ²¹	CRI OPTIONS	CCT OPTIONS
03 ²²	SL	357	134	2.7	80+ 90+	2700K 3000K 3500K 4000K 5000K
	WS	394	148			
	AL	425	160			
	LG	395	149			
05 ²²	SL	505	133	3.8		
	WS	559	147			
	AL	602	158			
	LG	560	147			
07 ²²	SL	771	131	5.9		
	WS	853	145			
	AL	918	156			
	LG	855	145			
10 ²²	SL	1028	129	8		
	WS	1137	143			
	AL	1224	153			
	LG	1140	143			
12 ²²	SL	1210	127	9.5		
	WS	1338	141			
	AL	1440	152			
	LG	1341	141			
15 ²²	SL	1516	125	12.2		
	WS	1676	138			
	AL	1804	148			
	LG	1681	138			
TUNE	SL (Warm White)	1044	74	14.2	90	2700K - 6500K
	SL (Cool White)	1108	78			
RGB ²³	SL	209	44	4.7	N/A	
RGBW ²³	SL	209	31	6.7	W: 80 CRI	W: 3500K

²¹Lumens/Watt and Watts/ft have been calculated assuming a driver efficiency of 85%. Depending on field conditions, actual measured values may fluctuate by 5-8%.

²²Performance calculations are based on LM-79 test of 600lm output at 80 CRI and 3500K. All other output calculations are extrapolated values.

²³Performance calculations are derived from LM-79 test with all RGB LEDs illuminated (Red, Green, Blue) and White LED only illuminated



ALW

DRIVERS

PRODUCT CODE	DESCRIPTION
V00	0-10V dimming down to 1% with electronic dim-to-off (0%).
V01	0-10V dimming down to 1%.
LDE	Lutron Hi-Lume (LDE1) 1% EcoSystem LED driver with Soft-on, Fade-to-Black dimming technology.
P01	TRIAC Forward Phase 2-Wire and ELV Reverse Phase 3-Wire hybrid LED driver. Dimming down to 1%. 120VAC only.
ELO	EldoLED 0-10V SOLODrive 0.1% dimming with electronic dim-to-off (0%).
TSE	Lutron T-Series (PSQ0) 1% 2-channel tunable white driver (For use with Lutron Quantum Control Systems).
DAL	DALI flicker-free dimming down to 1% with electronic dim-to-off (0%).
DMX	DMX flicker-free dimming down to 0%.
POE/READY	Specify a PoE driver of your choice. Fixture supplied with low voltage leads and no LED driver. Contact ALW to register your project.

* Most drivers can be programmed to specific dimming levels if desired. Contact ALW for specific dimming level requests.
 ALW lighting fixtures are intended for use with a wide range of sensors, lighting controls, LED drivers, and building management systems. If there are specific components required for your application that aren't listed on this spec sheet, please contact ALW customer support to specify a compatible solution of your choice.

DRIVER/LED LAMPING COMPATIBILITY						
	STD	STD/BIOS	TUNE*	RGB OR RGBW	CA TITLE 24 JA8/JA10 ²⁴	IEEE P1789 & HD TV STUDIO ²⁵
V00	●	●	●		●	
V01	●	●	●		●	
LDE	●	●			●	●
P01	●	●			●	
ELO	●	●	●		●	●
TSE			●		●	●
DALI	●	●	●		●	
DMX	●	●	●	●	PER REQUEST	PER REQUEST
POE/READY	PER REQUEST					

- - Indicates compatibility
- * Standard lamping (STD) - 350 - 1500 lm/ft
- ²⁴ Fixtures specified with 90CRI 2700K, 3000K, 3500K, 4000K, and 5000K lamping with applicable LED drivers have the ability to conform to California Title 24 JA8 and JA10 Appendices
- ²⁵ The following drivers conform to IEEE P1789 Flicker Standard: 'IEEE Recommended Practices for Modulating Current in High-Brightness LEDs for Mitigating Health Risks to Viewers'. These drivers may also be installed in HD TV Studio applications utilizing high frequency camera equipment.

*ELO with TUNE Lamping will include an EldoLED DUALDrive 0-10V Tunable White LED Driver.



PHOTOMETRICS - STANDARD LENSES

OPTIC	POLAR PLOT (CD)	MTG HEIGHT	LIGHT LEVEL (FC)	SPACING CRITERION (SC) ²⁶ (0° - 180°) (90° - 270°)	MAX INTENSITY (CD)	OUTPUT (LM/FT)
LG		6 ft	18.4	1.20 1.14	619.4	1398
		8 ft	10.3			
		10 ft	6.6			
		12 ft	4.6			
		14 ft	3.4			
		16 ft	2.6			
SL		6 ft	11.9	1.24 1.24	428.8	1204
		8 ft	6.7			
		10 ft	4.3			
		12 ft	3.0			
		14 ft	2.2			
		16 ft	1.7			

*Photometric calculations based on 1200lm 3500K 80 CRI fixture combination. Actual results may vary in the field.

For footcandle and output multipliers refer to the [ALW Lightplane+ IES File Multipliers Chart](#)

²⁶Spacing criterion refers to maximum distance luminaires can be spaced to provide uniform illumination on the working plane or surface.
Luminaire spacing = Spacing Criterion (SC) x Mounting Height (MH) (ex. 1.14 (SC) x 10' (MH) = 11.4' Luminaire Spacing).



PHOTOMETRICS - CONTROLROLL

OPTIC	POLAR PLOT (CD)	MTG HEIGHT	LIGHT LEVEL (FC)	SPACING CRITERION (SC) ²⁷ (0°- 180°) (90°- 270°)	MAX INTENSITY (CD)	OUTPUT (LM/FT)
AL		6 ft	19	1.18 1.48	784.5	1804
		8 ft	10.7			
		10 ft	6.9			
		12 ft	4.8			
		14 ft	3.5			
		16 ft	2.7			
WS		6 ft	16	1.4 1.2	578.6	1676
		8 ft	9			
		10 ft	5.8			
		12 ft	4			
		14 ft	2.9			
		16 ft	2.3			
LG		6 ft	20.7	1.02 1.14	745.8	1681
		8 ft	11.7			
		10 ft	7.5			
		12 ft	5.2			
		14 ft	3.8			
		16 ft	2.9			
SL		6 ft	16.1	1.22 1.20	579.6	1516
		8 ft	9.1			
		10 ft	5.8			
		12 ft	4			
		14 ft	3			
		16 ft	2.3			

*Photometric calculations based on 1ft length, 1500lm, 3500K, 80 CRI fixture combination. Actual results may vary in the field.

For footcandle and output multipliers refer to the [ALW Lightplane+ IES File Multipliers Chart](#)

²⁷Spacing criterion refers to maximum distance luminaires can be spaced to provide uniform illumination on the working plane or surface.
Luminaire spacing = Spacing Criterion (SC) x Mounting Height (MH) (ex. 1.14 (SC) x 10' (MH) = 11.4' Luminaire Spacing).



ADDITIONAL OPTIONS & SPECIFICATIONS

LED PERFORMANCE

80 CRI | L70 Calculated Hours: 180,000hrs
L80 Calculated Hours: 119,000hrs


90 CRI | L70 Calculated Hours: 171,000hrs
L80 Calculated Hours: 108,000hrs

HOUSING


100% recyclable, extruded architectural grade 6063 aluminum with a 0.09" minimum wall thickness.

LENS & OPTICS


ALW offers three different lens types: Flush, ControlRoll Flush, Reveal and Regressed. A wide range of optics are available including, Lamberian, Asymmetric ControlRoll, Low Glare, and Widespread ControlRoll. See page 4 for the Lens & Optics Compatibility chart.



FN
STANDARD FLUSH



RN
REGRESSED



CN
CONTROLROLL FLUSH

The optically engineered ControlRoll lens provides smooth, uniform, and seamless illumination for linear lengths of 250' to eliminated lens gaps. ControlRoll lens rolls out and presses into the housing channel for easy installation.



SAFETY & REGULATORY

ETL Listed (U.S. & Canada). Suitable for dry or damp locations.

For integral driver, Conforms to UL std. 1598 luminaires,

For remote driver, Conforms to UL std. 2018 luminaires.

Certified to CSA std. C22.2#250.0:2008 Ed. 3+G1;G2.

Fixtures specified with 90CRI, 2700K, 3000K, 3500K, and 4000K lamping with applicable LED drivers have the ability to conform to **California Title 24 JA8 and JA10** Appendices. EldoLED and Lutron conform to IEEE P1789 Flicker Standard: 'IEEE Recommended Practices for Modulating Current in High-Brightness LEDs for Mitigating Health Risks to Viewers.

DECLARE

All LightPlane+ models are Declared and Red List Approved. Declare Label is a comprehensive product transparency platform designed to empower manufacturers, designers, and consumers with detailed information about the ingredients and environmental impact of building products. Managed by the International Living Future Institute (ILFI), the platform provides a standardized "nutrition label" for products, disclosing material content, sourcing details, and the end-of-life potential. This initiative supports the Living Building Challenge by promoting sustainable and healthy materials, facilitating informed choices in the architecture and construction industries, and fostering transparency and accountability in the manufacturing process.

OPERATING TEMPERATURE

Luminaire should be installed and operated ONLY in dry environments where the ambient temperature ranges from -4°F to 122°F (-20°C to 50°C). Luminaire operation in environments outside the listed temperature range voids the warranty AND may damage the product or adversely impact lamp life, lumen output and color consistency.

WEIGHT

Approximately 2lbs. per linear foot. Weight may vary depending on additional options selected.

EMERGENCY OPTIONS

Emergency options are available for various applications including 10W Emergency Batteries (EMB), EMC circuits (EMC), Generator Transfer Devices (GTD), and Automated Load Control Relays (ALC). Contact ALW for emergency component spec sheets.

EMBEDDED CONTROLS, SENSORS, & OEM COMPONENTS

ALW lighting fixtures are intended for use with a wide range of embedded OEM components (control devices, occupancy and photocell sensors, LED drivers) for use with specified building management systems. Our component portfolio is continually expanding to adopt to the latest technologies and specification needs.

ALW is your embedded controls partner, supporting integration with Acuity, Avi-on, Casambi, Cooper Wavelinx, Encelium, Enlighted, Lutron, NX Controls, Wattstopper, eldoLED, Philips, Molex PoE, NuLEDs PoE, WTEC Smartengine PoE, and more. If there's a component or system required that you don't see on the spec sheet please contact ALW customer support today so we can review your requirements.

Rev 122024